


5 MM TRACKS


RECESS TRACKS

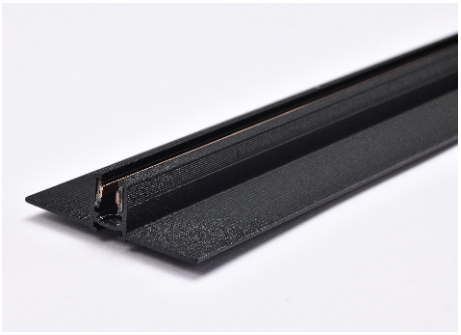

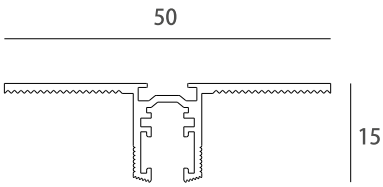





WDT-L01




WDT-J01




WT-END




WT-E01



WT-E02


WT0524100W


WRT-C01




WT-E04


Type	Electrical Parameters	Length (mm)
WDT-1M	DC 24V	1000
WDT- 2M	DC 24V	2000

SURFACE TRACKS










WST-L02




WST-J02


WST-C01




Type	Electrical Parameters	Length (mm)
WST-1M	DC 24V	1000
WST- 2M	DC 24V	2000

WDT

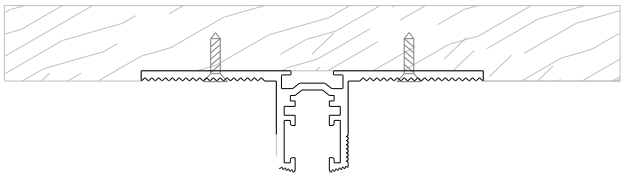

WST

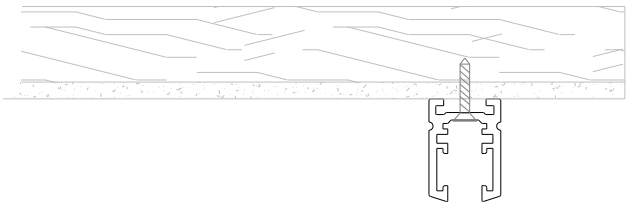



RECESS

SURFACE

RECESS CURVE TRACK






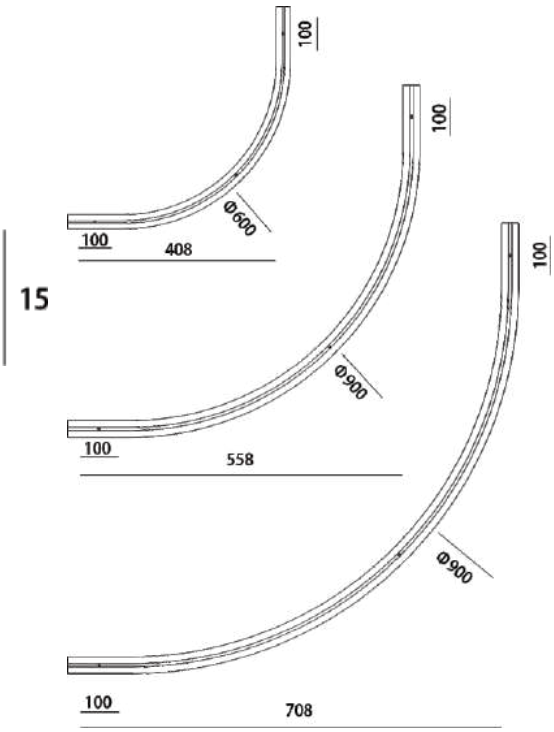


Type	Electrical Parameters	Length (mm)
WDT-R600Q	DC 24V	600MM
WDT-R900Q	DC 24V	900MM
WDT-R1200Q	DC 24V	1200MM


SURFACE CURVE TRACK





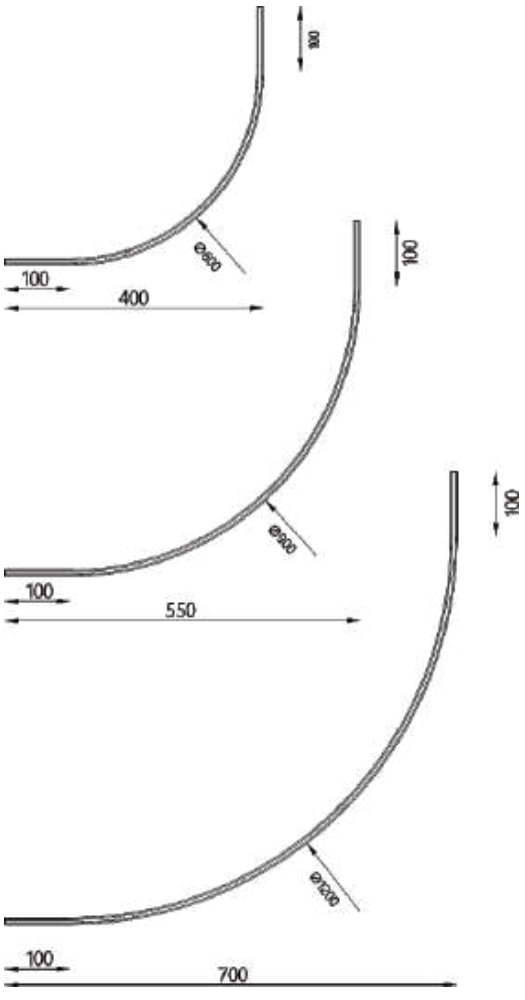


Type	Electrical Parameters	Length (mm)
WST-R300Q	DC 24V	300
WST-R300Q	DC 24V	600
WST-R300Q	DC 24V	900
WST-R300Q	DC 24V	1200

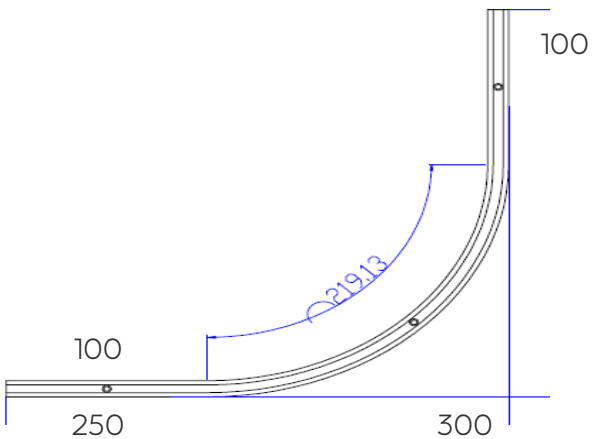


KELVIN & WATTS

Mini
Magnet Track

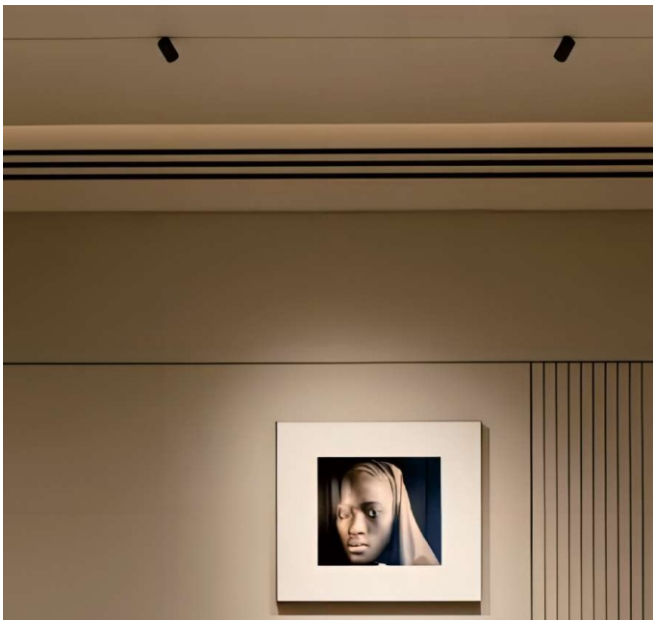

WSA0535DR





High CRI | IP20 | 355° | 90°

BK


LightSource: COB
Luminousflux: 500lm
CRI: Ra>90
CCT: 3000K/4000K

Material: Aluminum
Power: 5W
Outputvoltage: 36V
Outputcurrent: 120mA

OPTIC: 36°
Mainsvoltage: DC24V
Description: Magnetic rail spotlight
Cutout: /

WSA0545DR





High CRI | IP20 | 355° | 90°

BK AU

LightSource: COB
Luminousflux: 700lm
CRI: Ra>90
CCT: 3000K/4000K

Material: Aluminum
Power: 9W
Outputvoltage: 36V
Outputcurrent: 200mA

OPTIC: 36°
Mainsvoltage: DC24V
Description: Magnetic rail spotlight
Cutout: /






Extremely Slim Design



WWA0560NR-B





High CRI | IP20


LightSource: COB
Luminousflux: 450lm
CRI: Ra>90
CCT: 3000K/4000K

Material: Aluminum
Power: 5W
Outputvoltage: 36V
Outputcurrent: 120mA

OPTIC: 36°
Mainsvoltage: DC24V
Description: Magneticsuction
Colors: BK AU

WWB0513NR





High CRI | IP20

COLORS BK


LightSource: LED
Luminousflux: 700lm
CRI: Ra>80
CCT: 3000K/4000K

Material: Aluminum
Power: 12W
Outputvoltage: 24V
Outputcurrent: /

OPTIC: 100°
Mainsvoltage: DC24V
Description: Magneticsuction
Cutout: /

WWB0514NR





High CRI | IP20

COLORS BK

LightSource: LED
Luminousflux: 1100lm
CRI: Ra>80
CCT: 3000K/4000K

Material: Aluminum
Power: 18W
Outputvoltage: 24V
Outputcurrent: /

OPTIC: 100°
Mainsvoltage: DC24V
Description: Magneticsuction
Cutout: /







KELVIN & WATTS

RECESS LINEAR

WLB0560NS






High CRI | IP20


LightSource: LED
Luminousflux: 900lm
CRI: Ra>80
CCT: 3000K/4000K

Material: Aluminum+PC
Power: 10W
Outputvoltage: 24V
Outputcurrent: /

OPTIC: 100°
Mainsvoltage: DC24V
Description: Magneticsuction
Cutout: /

WLB0590NS





High CRI | IP20

LightSource: LED
Luminousflux: 1300lm
CRI: Ra>80
CCT: 3000K/4000K

Material: Aluminum+PC
Power: 15W
Outputvoltage: 24V
Outputcurrent: /

OPTIC: 100°
Mainsvoltage: DC24V
Description: Magneticsuction
Cutout: /



COLORS

BK


KELVIN & WATTS





WLB1030NS


DIFFUSED LINEAR



High CRI | IP20

LightSource: LED
Material: Aluminum
OPTIC: 100°
Luminousflux: 700lm
Power: 8W
Mainsvoltage: DC24V
CRI: Ra>80
Outputvoltage: 24V
Description: Magneticsuction
CCT: 3000K/4000K
Outputcurrent: /
Cutout: /


WLB1045NS



High CRI | IP20

LightSource: LED
Material: Aluminum
OPTIC: 100°
Luminousflux: 1100lm
Power: 12W
Mainsvoltage: DC24V
CRI: Ra>80
Outputvoltage: 24V
Description: Magneticsuction
CCT: 3000K/4000K
Outputcurrent: /
Cutout: /


WLB1060NS



High CRI | IP20

LightSource: LED
Material: Aluminum
OPTIC: 100°
Luminousflux: 1300lm
Power: 16W
Mainsvoltage: DC24V
CRI: Ra>80
Outputvoltage: 24V
Description: Magneticsuction
CCT: 3000K/4000K
Outputcurrent: /
Cutout: /

WLB1090NS



High CRI | IP20

LightSource: LED
Material: Aluminum
OPTIC: 100°
Luminousflux: 2300lm
Power: 24W
Mainsvoltage: DC24V
CRI: Ra>80
Outputvoltage: 24V
Description: Magneticsuction
CCT: 3000K/4000K
Outputcurrent: /
Cutout: /

COLORS

BK

KELVIN & WATTS






W05MAGNETSYSTEMseries

LASER BLADE


WLA1006NS



High CRI | IP20

LightSource: LED
Luminousflux: 500lm
CRI: Ra>90
CCT: 3000K/4000K
Material: Aluminum
Power: 5W
Outputvoltage: 24V
Outputcurrent: /
OPTIC: 30°
Mainsvoltage: DC24V
Description: Magneticsuction
Cutout: /


WLA1012NS



High CRI | IP20

LightSource: LED
Luminousflux: 1100lm
CRI: Ra>90
CCT: 3000K/4000K
Material: Aluminum
Power: 10W
Outputvoltage: 24V
Outputcurrent: /
OPTIC: 30°
Mainsvoltage: DC24V
Description: Magneticsuction
Cutout: /


WLA1018NS



High CRI | IP20

LightSource: LED
Luminousflux: 1600lm
CRI: Ra>90
CCT: 3000K/4000K
Material: Aluminum
Power: 15W
Outputvoltage: 24V
Outputcurrent: /
OPTIC: 30°
Mainsvoltage: DC24V
Description: Magneticsuction
Cutout: /

WLA1024NS



High CRI | IP20

LightSource: LED
Luminousflux: 2300lm
CRI: Ra>90
CCT: 3000K/4000K
Material: Aluminum
Power: 20W
Outputvoltage: 24V
Outputcurrent: /
OPTIC: 30°
Mainsvoltage: DC24V
Description: Magneticsuction
Cutout: /


COLORS

KELVIN & WATTS

MOVABLE LASER BLADE

WLA1506DS





High CRI IP20

LightSource: LED
Luminousflux: 221lm
CRI: Ra>90
CCT: 3000K/4000K


Material: Aluminum
Power: 6W
Outputvoltage: 24V
Outputcurrent: /

OPTIC: 30°
Mainsvoltage: DC24V
Description: Magnetic spot light
Cutout: /

WLA1512DS



WWB0501B



High CRI IP20

LightSource: LED
Luminousflux: 430lm
CRI: Ra>90
CCT: 3000K/4000K


Material: Aluminum
Power: 12W
Outputvoltage: 24V
Outputcurrent: /

OPTIC: 30°
Mainsvoltage: DC24V
Description: Magnetic spot light
Cutout: /



COLORS

WH



High CRI IP20

LightSource: LED
Luminousflux: 105lm
CRI: Ra>90
CCT: 3000K

Material: Aluminum
Power: 3W
Outputvoltage: 3V
Outputcurrent: 600mA

OPTIC: 360°
Mainsvoltage: DC24V
Description: Magnetic glass ball
Cutout: /




KELVIN & WATTS

PENDANT 5MM TRACK








High CRI | IP20

COLORS

AU

LightSource: LED	Material: Aluminum	OPTIC: 24°
Luminousflux: 180lm	Power: 3W	Mainsvoltage: DC24V
CRI: Ra>90	Outputvoltage: 3V	Description: Magneticsuction
CCT: 3000K	Outputcurrent: 600mA	Cutout: /





High CRI | IP20


COLORS

BK WH

LightSource: COB	Material: Aluminum	OPTIC: 40°
Luminousflux: 450lm	Power: 5W	Mainsvoltage: DC24V
CRI: Ra>90	Outputvoltage: 9V	Description: Magneticsuction
CCT: 3000K	Outputcurrent: 450mA	Cutout: /

WPB6208NR





Ø45

High CRI | IP20

COLORS

WH AU

LightSource: LED	Material: Aluminum	OPTIC: 24°
Luminousflux: 180lm	Power: 3W	Mainsvoltage: DC24V
CRI: Ra>90	Outputvoltage: 3V	Description: Magneticsuction
CCT: 3000K	Outputcurrent: 600mA	Cutout: /

KELVIN & WATTS

Linear Silicon Strip

W05MAGNETSYSTEMseries





WYB0501NS



1000

High CRI

IP20

LightSource: LED	**Material:** Silicone	**OPTIC:** 100°
Luminousflux: /	**Power:** 8W	**Mainsvoltage:** DC24V
CRI: Ra>80	**Outputvoltage:** 24V	**Description:** Light Strip
CCT: 3000K	**Outputcurrent:** /	**Cutout:** /

WYB0502NS



2000

High CRI

LightSource: LED	**Material:** Silicone	**OPTIC:** 100°
Luminousflux: /	**Power:** 16W	**Mainsvoltage:** DC24V
CRI: Ra>80	**Outputvoltage:** 24V	**Description:** Light Strip
CCT: 3000K	**Outputcurrent:** /	**Cutout:** /

COLORS

WH