www.jingyinglight.com

JINGYING
lighting

C26

FLOWING GEOMETRY

Redefine your space with light.

GUANDONG JINGYING LIGHTING CO.,LTD
广东精颖灯饰有限公司

广东省中山市古镇镇华艺广场1楼9-10卡
No.9-10 Ist Floor , Huayi plaza Guzhen Town, Zhongshan City,
Guangdong Priovince

TEL:+86-760-89833225

PRODUCT CULTURE

LIGHT

FOR THE FUTURE

光 临 未 来

JINGYING

lighting



ABOUTUS

精颖品牌简介

精颖品牌创立于 2009 年，是一家专注 LED 现代灯产业的供应商和知名品牌商，业务遍布全球 130 个国家及城市。

凭借着创始人和团队深厚的商业照明底蕴，精颖自创立之初就提出了光学艺术化的理念，将光学设计和灯饰设计融合一体化，将商照的功能性专业性与灯饰的设计感和艺术美感相结合。

精颖总部坐落于广东省江门国家高新技术工业区，拥有 30000 多平方米国际高标准的生产制造基地、五级品质管理体系、科学系统的营销管理模式，并在丹麦，意大利建立了跨国研发设计室，汇集数百名行业资深的的灯饰产品研发专家和生产工艺管理精英，公司荣获 50 余项产品专利，通过 ISO9001:2000 国际质量体系、欧盟 CE、ROHS、中国国家 CCC 强制证等国内外权威认证。并且建立了完整的产品线，匠心打造七大系列近千款产品，涵盖吊线灯、吸顶、墙壁、镜前灯、台灯、落地灯个墙角灯、庭院灯、商业照明等全系列精品灯饰，致力于光学艺术照明在家居、酒店及商业领域的广泛应用。

2018 年，精颖提出了“光临未来”品牌战略，视野更加国际化，积极与国外研究机构合作，进一步深度挖掘光学在灯饰中的表现形式，同时在设计理念上更加的前卫与创新，积极运用新的材料新的设计新的工艺现光的艺术，引领探索光与艺术更辽阔的未来。

Jingying, established in 2009.is a supplier and notable dealer in the LED modern lighting industry whose business scope covers 130 countries and cities globally. By virtue of the profound commercial accomplishments of both the founder and the team. Jingying has offered the idea of optical art since inception, integrated light source designs and lighting designs. and combined the functions of lighting with art.

Jingying ` s headquarters is located in Jiangmen ' s National Hi-Tech Zone in Guang-dong.With a production base larger that 30000 Spuare meters that meets interna-tional standsrds, it is also favored with a quality management system with five levels and a scientific.systematic marking management mode.Jingying has set up R&D offices in Denmark and Ltaly.gathered hundreds of lighting R&D experts experts and excel-been certified by ISO9001:2000 international quality system,CE,ROHS,CCC and other domestic and international authorities. Equipped with a complete pro-duction line.the company has developed about 1000 products that fit into seven Major categories:chandeliers,ceiling lamps.wall lamps,mirror lamps,desk desk lamps.

floor and corner lamps, and bollards light,Commercial lighting.The company has been broadly applying its concepts of artistic lighting in households,hotels. and commercial areas. In2018,Jingying developed the brand strategy Light of the Future.whice broad-ened our intermational vision and led us to seek for cooperation with international research institutes.

all the while further exploring modes of expression in optical lighting design. Jingying also

continued to pursue innovating and applying new ma terials.new designs,and new techniques

in optical art.pioneering a greater future of lighting and art.



Encounter the Beauty of Craftsmanship

卢梭曾说，在人类所有的职业中，工艺是一门最古老最正直的手艺。工艺在人的成长中功用最大，在物品的制造中通过手将触觉、视觉和脑力相协调，身心合一，使人得到健康成长。

而在这超时间、跨领域、跨时代的技艺里，有着世代手艺人的坚守与专注，他们拾起身体和工具的技艺，触摸那些有真实代入感的生活。

Rousseau once said that in all human professions,craftsman is the oldest and most upright.Technology plays the most important role in the growth of human beings.In the manufacture of goods,touch,vision and brains are coordinated by hand,and the body and mind are integrated,so that people can

grow healthily.In this time-consuming,cross-domain and cross-generational skill,there are generations of craftsmen who stick to and concentrate on picking up the memory of their bodies and tools and touching the real life.

From Modern Design To craftsmanship

从现代设计到手工工艺

在精颖的工艺中既有现代化的生产工艺，也有纯粹的手工工艺，从灵感的灵光一现到作品的最终呈现，精颖的每一件作品要经理生产，检测合计七十三道工序，每一道工序都是一件精颖艺术品不可或缺的主角。

In the exquisite craftsmanship,there are both modern production techniques and pure handicrafts. From the inspiration to the final presentation of the works,each pieces works of Jingying lighting through 73 processes of production and tests . Every process is indispensable.





Wonderful

精彩工艺 精彩纷呈

在精颖的工艺中既有现代化的生产工艺，也有纯粹的手工工艺，从灵感的灵光一现到作品的最终呈现，精颖的每一件作品要经理生产，检测合计七十三道工序，每一道工序都是一件精颖艺术品不可或缺的主角。

In the exquisite craftsmanship,there are both modern production techniques and pure handicrafts. From the inspiration to the final presentation of the works,each pieces works of Jingying lighting through 73 processes of production and tests . Every process is indispensable.






The C26 lighting system can meet various lighting needs. It comes with a wide range of accessories and can achieve any desired effect with simple installation. It is perfectly suitable for office lighting, exhibition halls, home lighting, hotels, and villa projects.

C26

LIGHTING SYSTEM

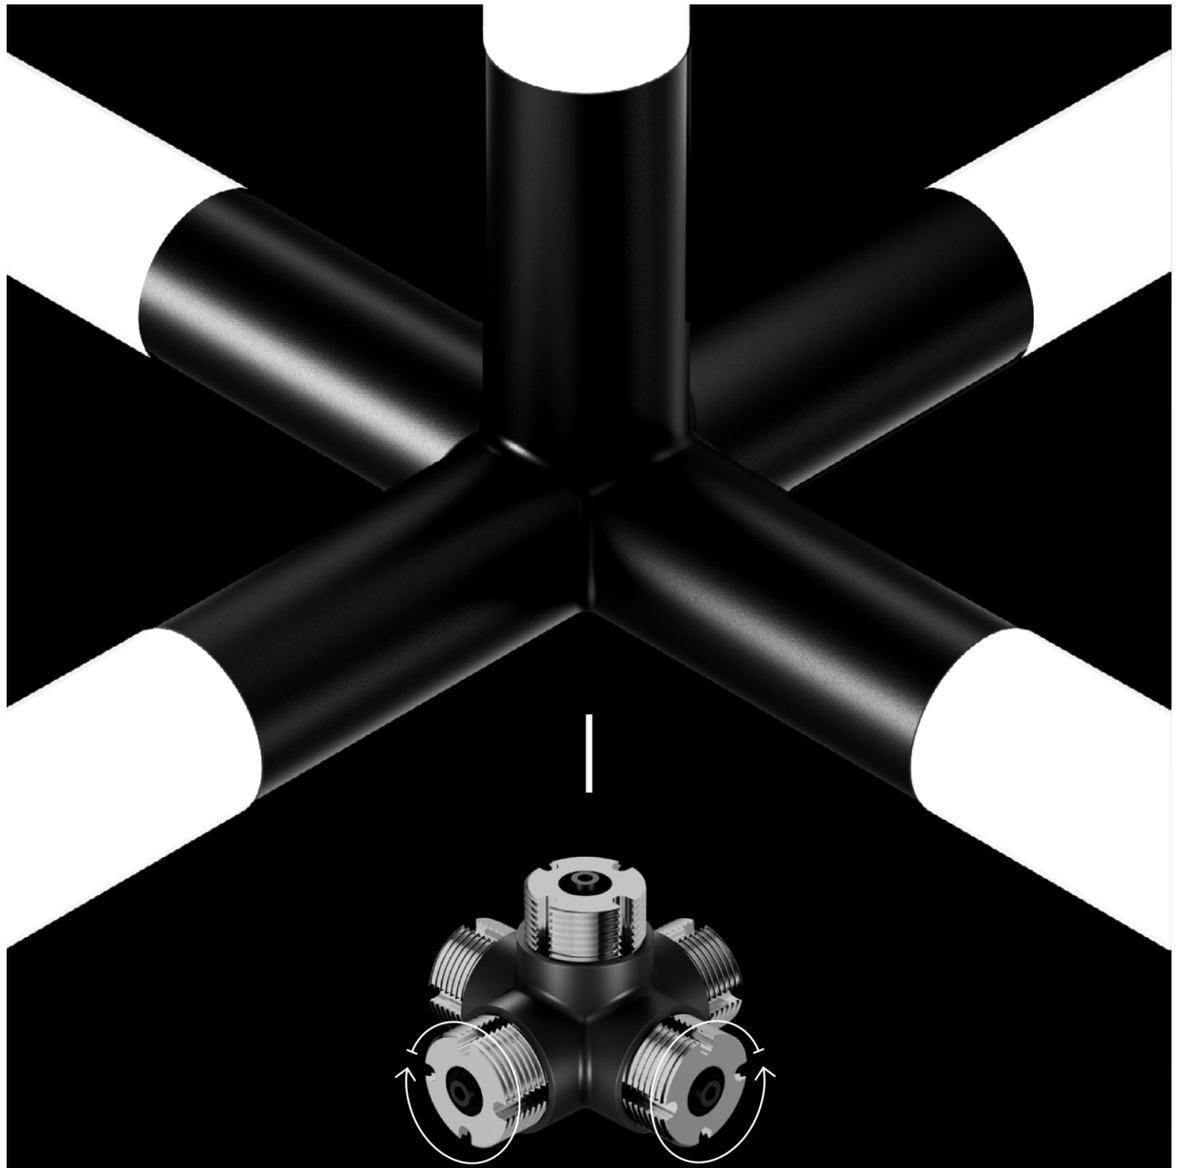

Due to the wide variety of L-shaped, T-shaped and X-shaped mechanical and electrical connection components, the C26 connection system offers the greatest design freedom. Therefore, it can easily achieve various geometric shapes, charming lighting sculptures and meet different spatial requirements.



one word connector
MODEL NO: C26-A01
Size(mm): Φ26.6x65
Material: Aluminum

Two-way swivel joint (rotatable)
MODEL NO: C26-D02
Size(mm): 55x55
Material: Aluminum

L-shaped connector
MODEL NO: C26-A02
Size(mm): 45x45
Material: Aluminum

T-shaped connector
MODEL NO: C26-A03
Size(mm): 65x45
Material: Aluminum

Y-shaped connector
MODEL NO: C26-A13
Size(mm): 45x45
Material: Aluminum

cross joint
MODEL NO: C26-A04
Size(mm): 65x65
Material: Aluminum

T-shaped lower connector
MODEL NO: C26-A14
Size(mm): 65x45
Material: Aluminum

Five way connector
MODEL NO: C26-A15
Size(mm): 65x65
Material: Aluminum

Input Base A
MODEL NO: C26-W01-036
Size(mm): 56.6x36
Material: Aluminum

Input Base B
MODEL NO: C26-W01-026
Size(mm): 56.6x26
Material: Aluminum

high-end fixed base
MODEL NO: C26-W02-320
Size(mm): Φ56.6x320
Material: Aluminum

high-end fixed base (Including driver) 100W
MODEL NO: C26-WB3-100W
Size(mm): Φ56.6x320
Material: Aluminum

high-end fixed base (Including driver) 150W
MODEL NO: C26-WB3-150W
Size(mm): Φ56.6x320
Material: Aluminum



one word connector
C26-A01-C



L-shaped connector
C26-A02-C



vertical L-connector
C26-V02-C



T-shaped connector
C26-A03-C



vertical T- shaped connector
C26-V03-C



Y-shaped connector
C26-A13-C



cross joint
C26-A04-C



T-shaped lower connector
C26-A14-C



Five way connector
C26-A15-C



Single head connector
C26-A00-C



Two-way swivel joint (rotatable)
C26-D02-C



one word connector
C26-A01-P



L-shaped connector
C26-A02-P



vertical L-connector
C26-V02-P




T-shaped connector
C26-A03-P




vertical T-shaped connector
C26-V03-P



Y-shaped connector
C26-A13-P



cross joint
C26-A04-P



T-shaped lower connector
C26-A14-P



Five way connector
C26-A15-P



Single head connector
C26-A00-P



Two-way swivel joint
C26-D02-P




connecting pipe
C26-C01-279
Φ26.6x279




connecting pipe
C26-C01-374
Φ26.6x374



shaft plug
C26-END
D24*H8



glass shelf
C26-B390
390*390*5



glass shelf
C26-B710
390*710*5

C26 Luminaires & track

The C26 system only requires one set of equipment to meet various lighting needs. It can be combined with the W05 series lamp accessories to create a unique lighting effect, bringing greater flexibility to lighting design.




CST26-1M/1.5M/2M

Material - Extruded aluminum profile with built-in pure copper wire guide
Surface treatment - Available in white, black Powder coating of other colors, customizable upon request.
Size - Diameter 26.6*Length 1020/1500/2000 Other sizes can be customized upon request.




CLA-2618NR/36/54

Material - aluminium extruded
Finished - with selection of white, black
& other colors powder coating finishes on requested.
Wattage - 8/16/24W
Beam Angle - 36°
CCT- 3000K 4000K 5000K
Size - L374*D26.6/L700*D26.6/L1020*D26.6



CLB-2603NR/06/10


Material - aluminium extruded
Finished - with selection of white, black
& other colors powder coating finishes on requested.
Wattage - 8/16/24W
Beam Angle - 120°
CCT- 3000K 4000K 5000K
Size - L374*D26.6/L700*D26.6/L1020*D26.6



CRR-2603NR/06/10

Material - aluminium extruded
Finished - with selection of white, black
& other colors powder coating finishes on requested.
Wattage - 8/16/24W
Beam Angle - 120°
CCT- 3000K 4000K 5000K
Size - L374*D26.6/L700*D26.6/L1020*D26.6






CST26-1M / 1.5M / 2M

Type	Specification	Electrical parameters	Size(mm)	Colour	Material
CST26-1M	Circular track	DC 24V	Φ26.6x1000	Black/White	Aluminium
CST26-1.5M	Circular track	DC 24V	Φ26.6x1500	Black/White	Aluminium
CST26-2M	Circular track	DC 24V	Φ26.6x2000	Black/White	Aluminium

CLA-2618NR








LightSource: LED
Luminousflux: /
CRI: Ra>90
CCT: 2700K/3000K/4000K

Material: Aluminum
Power: 8W
Description: Integrated grille light for the track

OPTIC: 36°
Mainsvoltage: DC24V
Size(mm) Φ26.6x374

CLA-2636NR








LightSource: LED
Luminousflux: /
CRI: Ra>90
CCT: 2700K/3000K/4000K

Material: Aluminum
Power: 16W
Description: Integrated grille light for the track

OPTIC: 36°
Mainsvoltage: DC24V
Size(mm) Φ26.6x697

CLA-2654NR








LightSource: LED
Luminousflux: /
CRI: Ra>90
CCT: 2700K/3000K/4000K

Material: Aluminum
Power: 24W
Description: Integrated grille light for the track

OPTIC: 36°
Mainsvoltage: DC24V
Size(mm) Φ26.6x1020


COLORS

BK WH

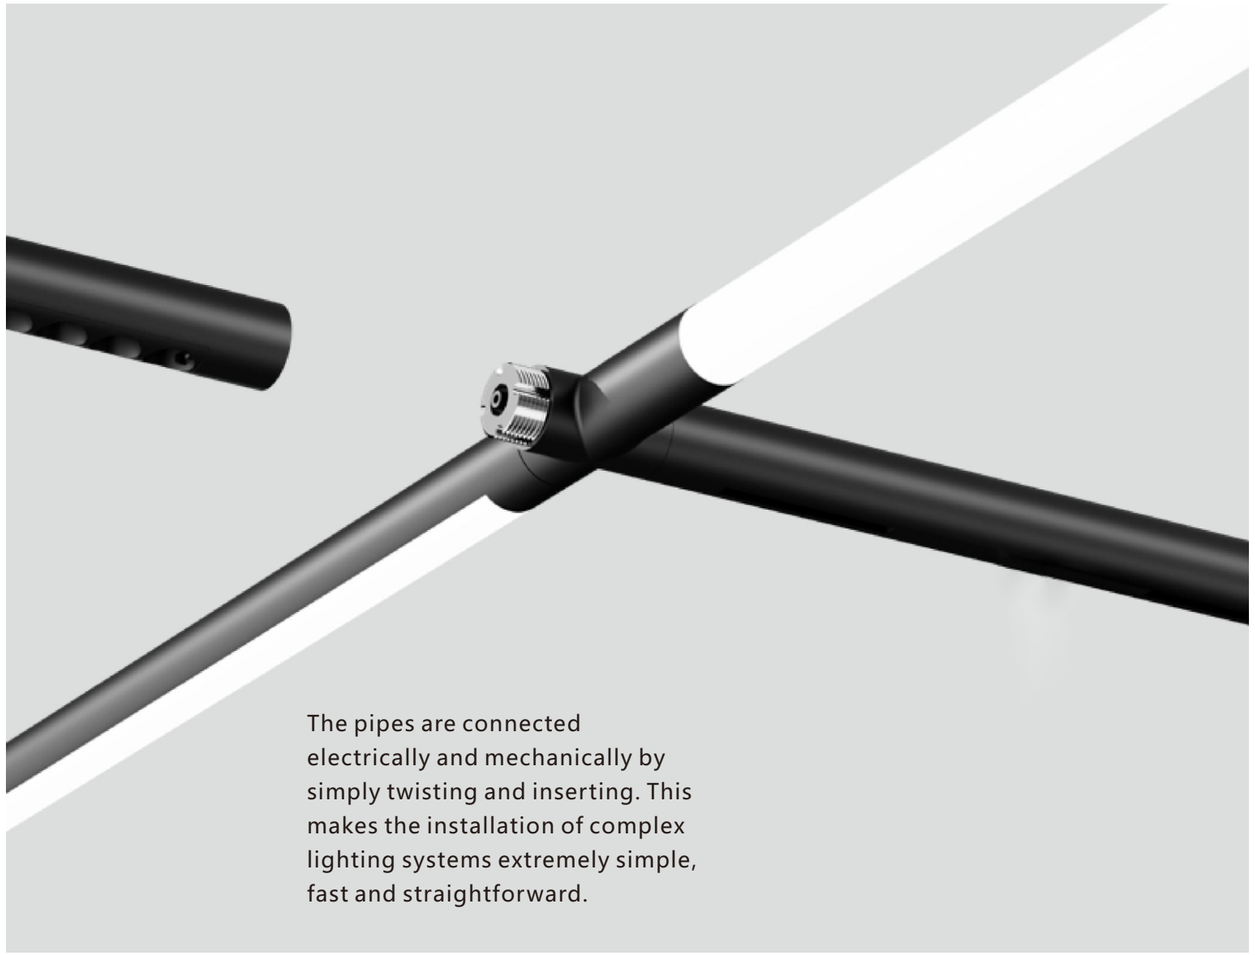

The pipes are connected electrically and mechanically by simply twisting and inserting. This makes the installation of complex lighting systems extremely simple, fast and straightforward.

CLB-2606NR

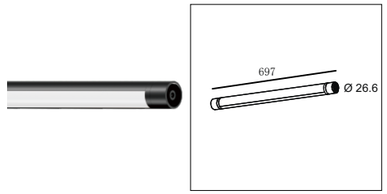


High CRI | IP20

LightSource: LED
Luminousflux: /
CRI: Ra>90
CCT: 2700K/3000K/4000K

Material: Aluminum
Power: 16W
Description: Rail integrated floodlight

OPTIC: 120°
Mainsvoltage: DC24V
Size(mm) Φ26.6x697

CLB-2610NR

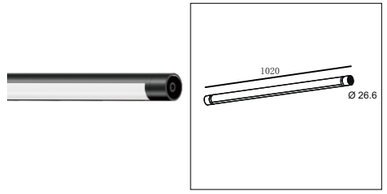


High CRI | IP20

LightSource: LED
Luminousflux: /
CRI: Ra>90
CCT: 2700K/3000K/4000K

Material: Aluminum
Power: 24W
Description: Rail integrated floodlight

OPTIC: 120°
Mainsvoltage: DC24V
Size(mm) Φ26.6x1020

CRR-2603NR

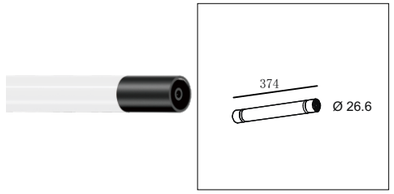


High CRI | IP20

LightSource: LED
Luminousflux: /
CRI: Ra>90
CCT: 2700K/3000K/4000K

Material: Aluminum
Power: 8W
Description: Rail integrated Fluorescent tube

OPTIC: 360°
Mainsvoltage: DC24V
Size(mm) Φ26.6x374

CRR-2606NR

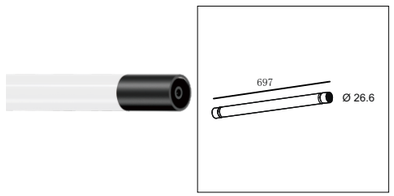


High CRI | IP20

LightSource: LED
Luminousflux: /
CRI: Ra>90
CCT: 2700K/3000K/4000K

Material: Aluminum
Power: 16W
Description: Rail integrated Fluorescent tube

OPTIC: 360°
Mainsvoltage: DC24V
Size(mm) Φ26.6x697

CLB-2603NR

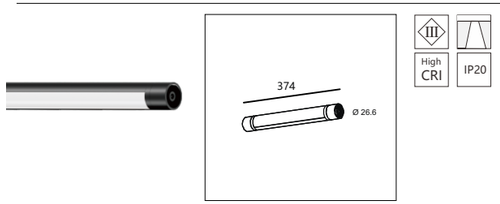


High CRI | IP20

LightSource: LED
Luminousflux: /
CRI: Ra>90
CCT: 2700K/3000K/4000K

Material: Aluminum
Power: 8W
Description: Rail integrated floodlight

OPTIC: 120°
Mainsvoltage: DC24V
Size(mm) Φ26.6x374

CRR-2610NR

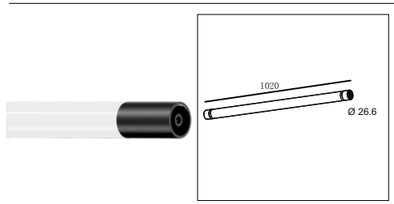

High CRI | IP20

LightSource: LED
Luminousflux: /
CRI: Ra>90
CCT: 2700K/3000K/4000K

Material: Aluminum
Power: 24W
Description: Rail integrated Fluorescent tube


OPTIC: 360°
Mainsvoltage: DC24V
Size(mm) Φ26.6x1020

COLORS


BK WH

COLORS

BK WH

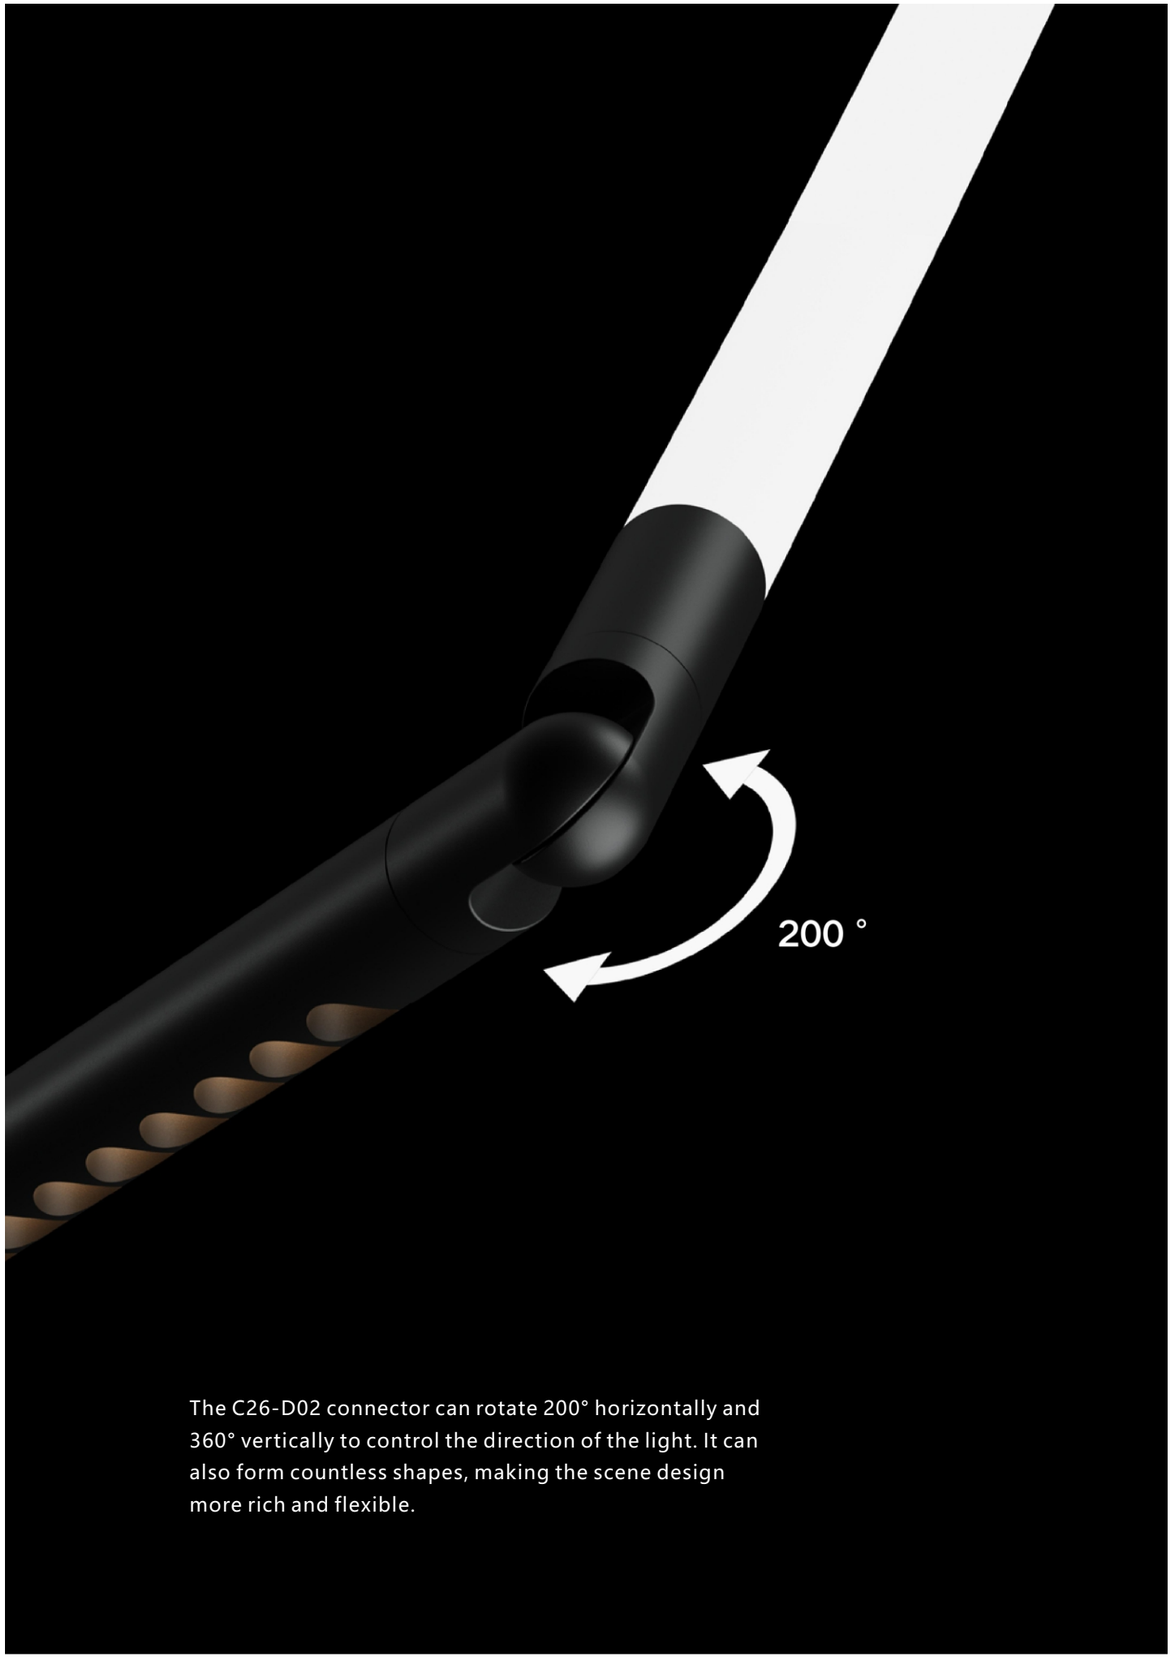

The C26-D02 connector can rotate 200° horizontally and 360° vertically to control the direction of the light. It can also form countless shapes, making the scene design more rich and flexible.

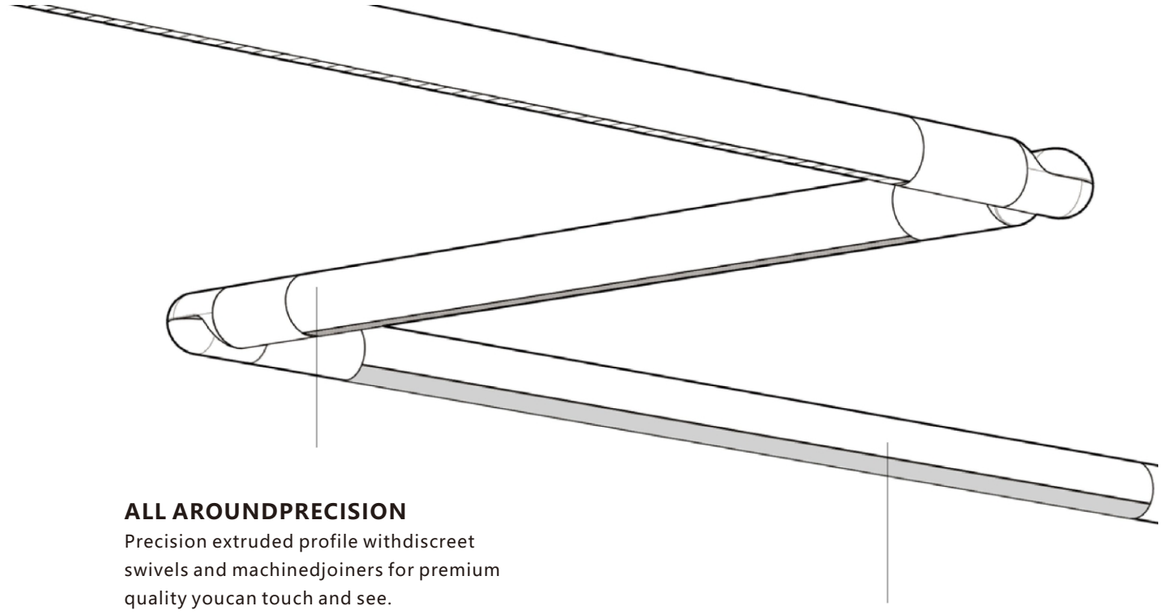


ALL AROUNDPRECISION

Precision extruded profile withdiscreet swivels and machinedjoiners for premium quality youcan touch and see.


Adapt to any space

The easily reconfigurable end cap and connection system can be ideal for any space, from a minimalist architectural corridor to a new generation of serpentine staircases.

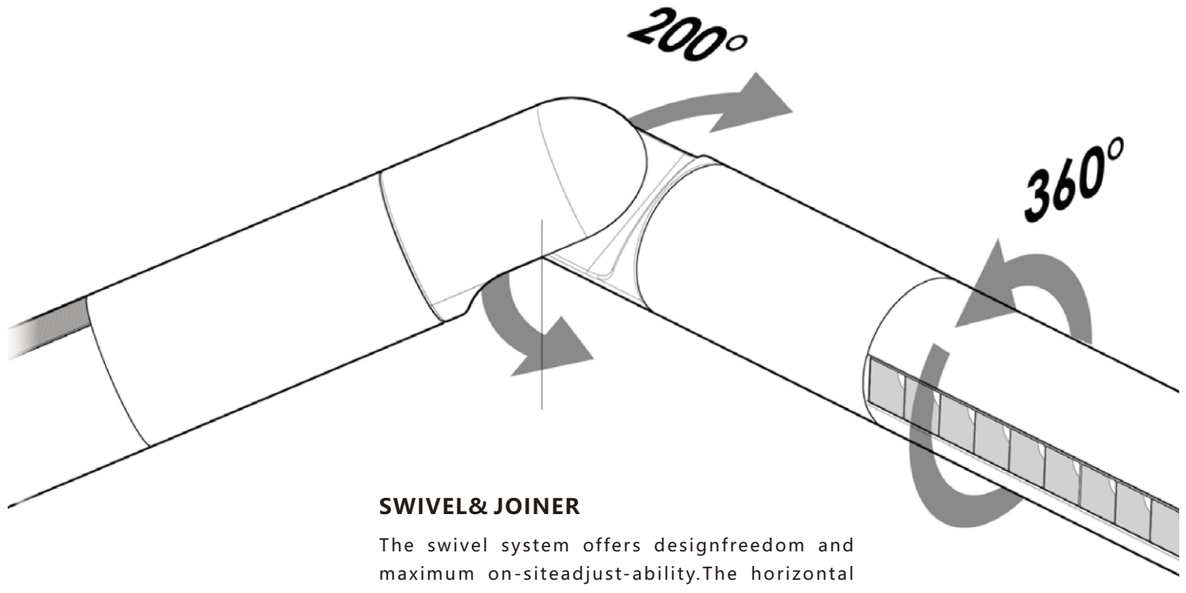


SWIVEL& JOINER

The swivel system offers designfreedom and maximum on-siteadjust-ability.The horizontal rotationof 200 ° and afull 360 ° rotation swivelenables configuration in any desireddirection and can be locked in aspecific set angle (360° rotation only).

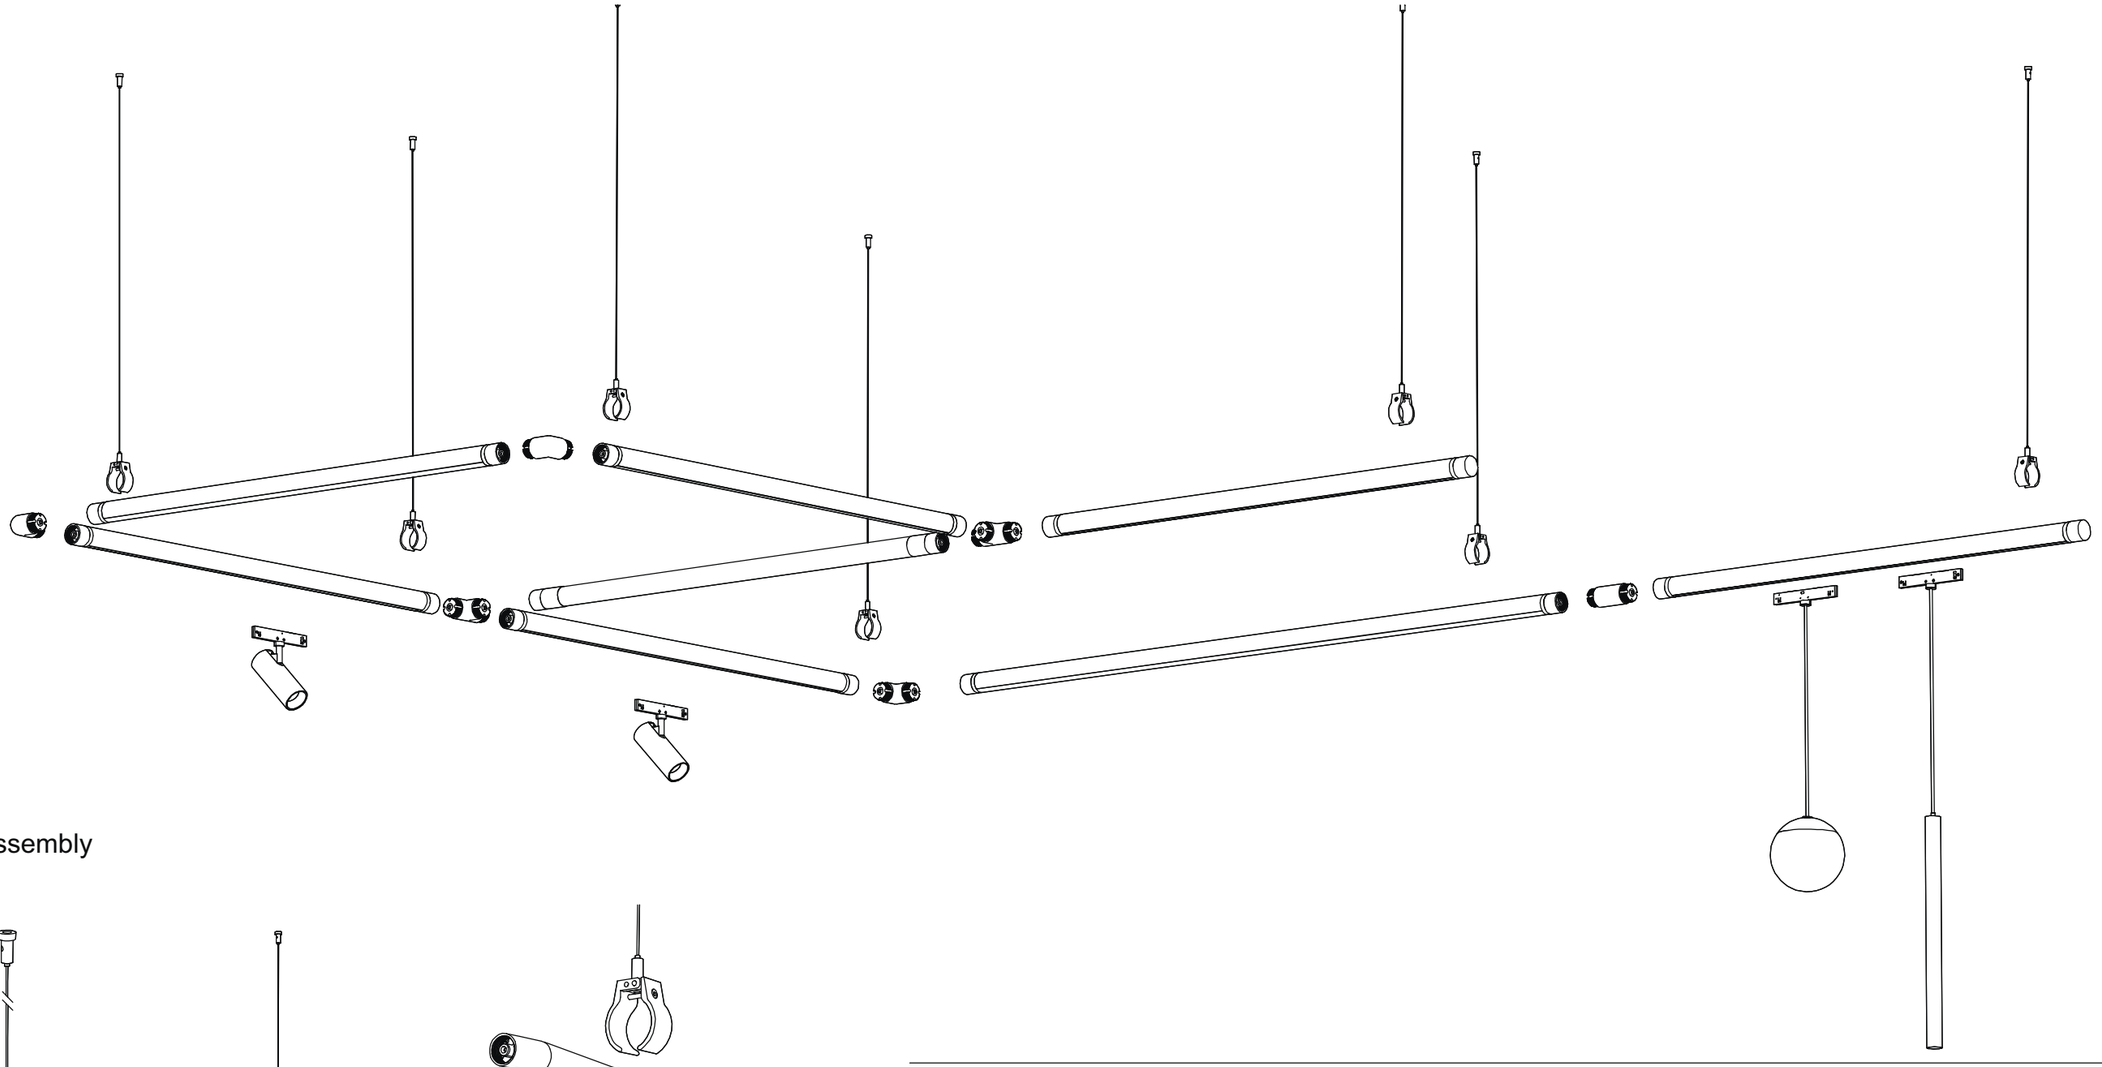

System Assembly

Compatible with all cylindrical lights and lighting tracks

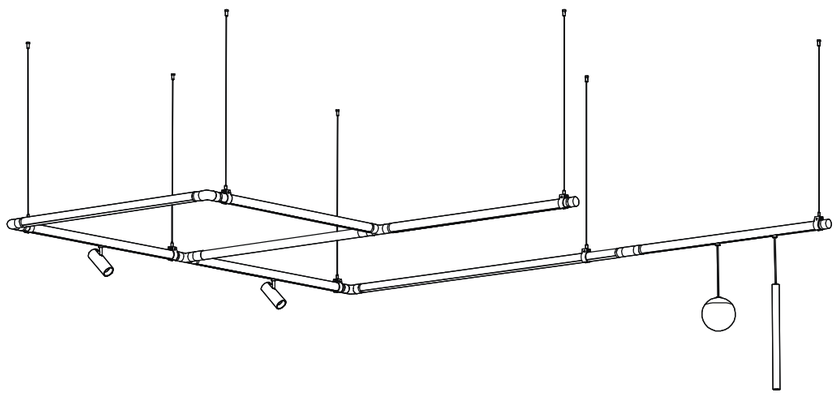





MAPPLETHORPE Perfection in Form








Assembly method

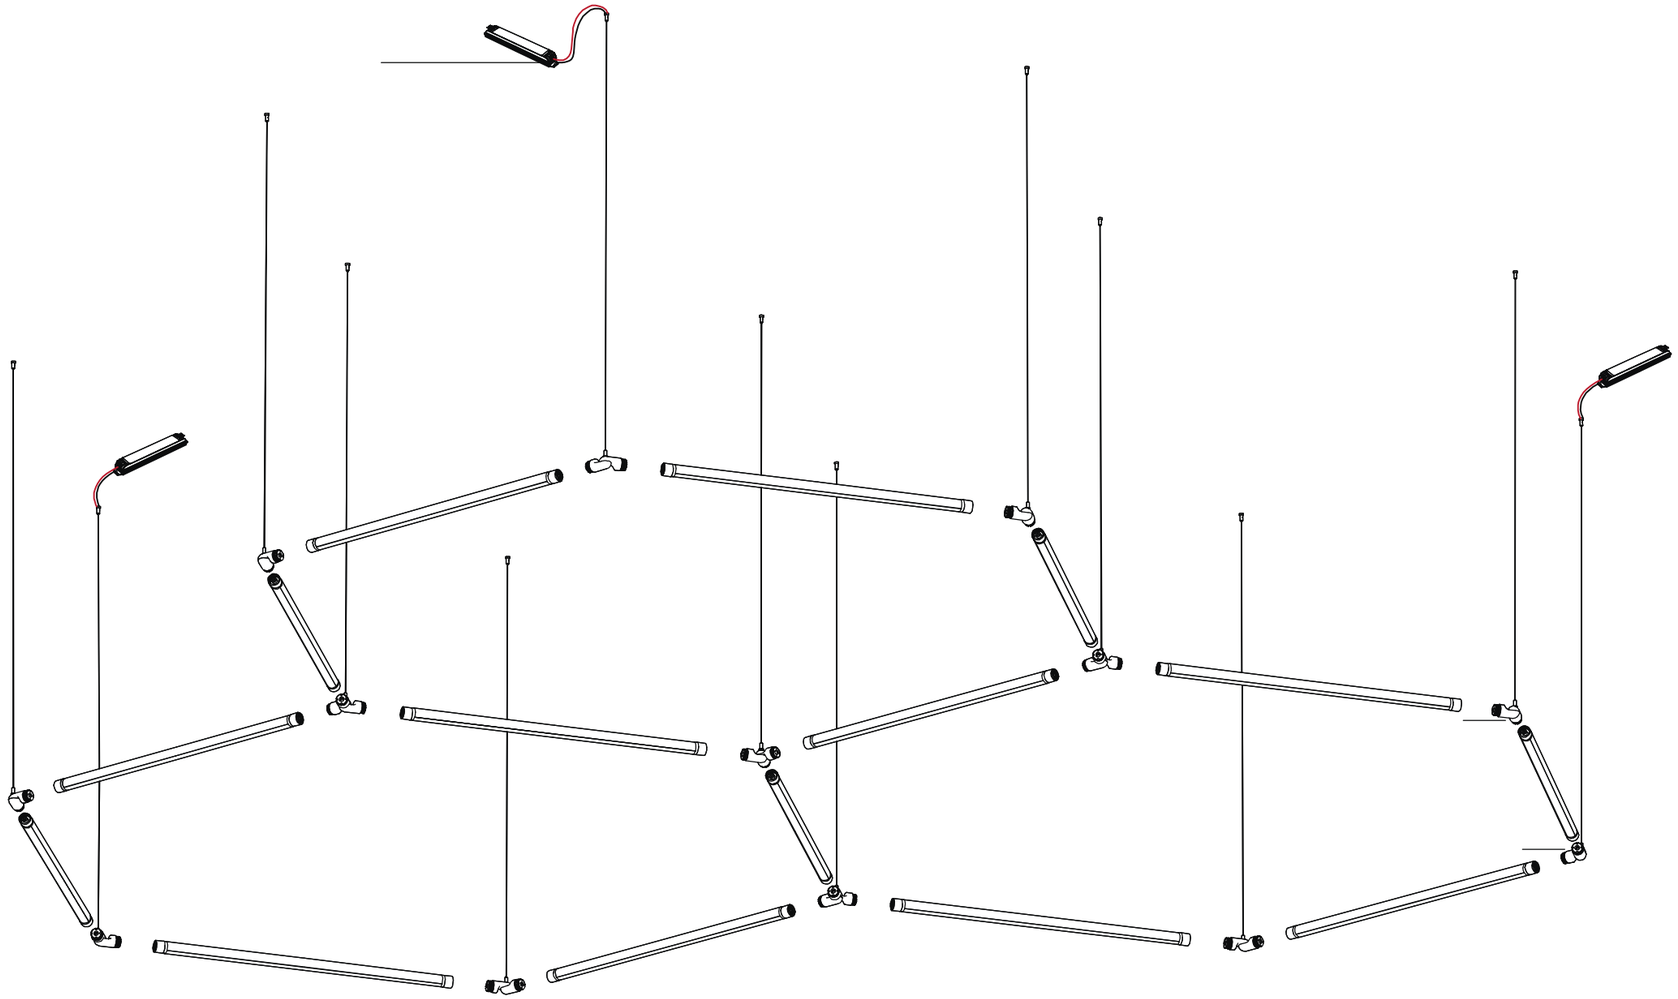

System Assembly

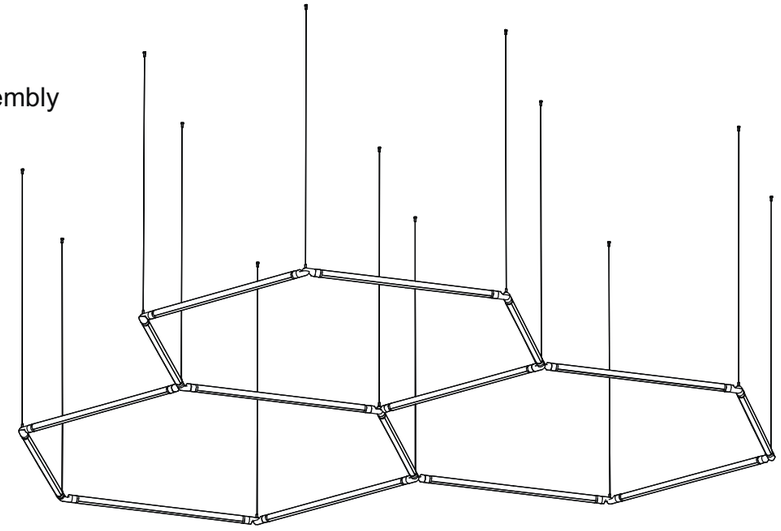






System Assembly


Size：766mm×468mm×886mm

Total Power：208W

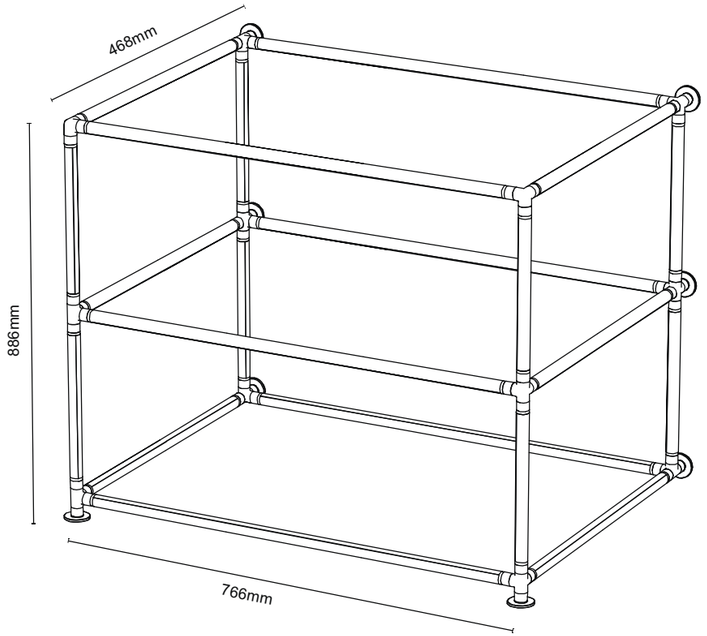



Assembly method

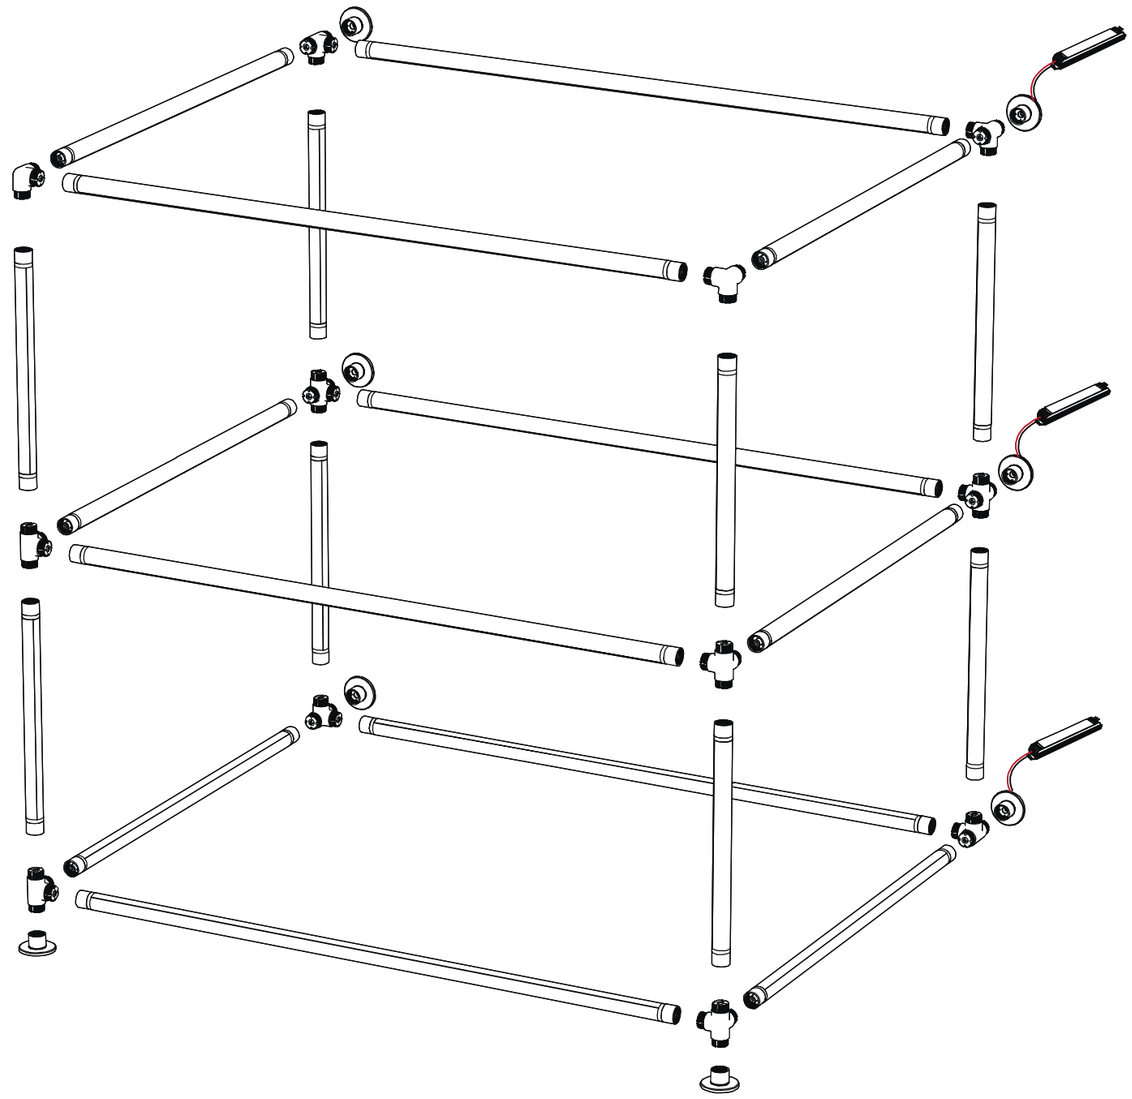

Activate the myriad forms of light and reshape your spatial imagination.
From minimalist lines to brilliant stars, more stunning light and shadow,






ABUNDANT
LIGHTING FIXTURES

There are various types of lamps,
which can meet the lighting
needs of different spaces.

WWA0560NR-A





High CRI IP20

LightSource:
COB

Luminousflux:
450lm

CRI:
Ra>90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
5W

Outputvoltage:
9V

Outputcurrent:
450mA

OPTIC:
15°/24°/36°


Mainsvoltage:
DC24V

Description:
Magneticsuction

Colors:
BK AU WH GY

WWA0560NR-B





High CRI IP20

LightSource:
COB

Luminousflux:
450lm

CRI:
Ra>90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
5W

Outputvoltage:
9V

Outputcurrent:
450mA

OPTIC:
15°/24°/36°


Mainsvoltage:
DC24V

Description:
Magneticsuction

Colors:
BK AU WH GY

WWA0560NR-C





High CRI IP20

LightSource:
COB

Luminousflux:
450lm

CRI:
Ra>90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
5W

Outputvoltage:
9V

Outputcurrent:
450mA

OPTIC:
15°/24°/36°


Mainsvoltage:
DC24V

Description:
Magneticsuction

Colors:
BK AU WH GY

WWA0560NR-D





High CRI IP20

LightSource:
COB

Luminousflux:
450lm

CRI:
Ra>90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
5W

Outputvoltage:
9V

Outputcurrent:
450mA

OPTIC:
15°/24°/36°


Mainsvoltage:
DC24V


Description:
Magneticsuction

Colors:
BK AU WH GY

WSA0425DR







LightSource:
LED

Luminousflux:
/

CRI:
Ra>90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
3W

Outputvoltage:
/

Outputcurrent:
/

OPTIC:
15°/24°/36°


Mainsvoltage:
DC24V

Description:
Vertically swingable 130° spotlight

Cutout:
/

WSA0435DR







LightSource:
COB

Luminousflux:
/

CRI:
Ra>90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
5W

Outputvoltage:
/

Outputcurrent:
/

OPTIC:
15°/24°/36°


Mainsvoltage:
DC24V


Description:
Vertically swingable 130° spotlight

Cutout:
/

WSA0445DR







LightSource:
COB

Luminousflux:
/

CRI:
Ra>90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
9W

Outputvoltage:
/

Outputcurrent:
/

OPTIC:
15°/24°/36°

Mainsvoltage:
DC24V

Description:
Vertically swingable 130° spotlight

Cutout:
/


COLORS


BK

W05MAGNETSYSTEMseries

WSA0525DR







LightSource:
LED

Luminousflux:
180lm

CRI:
Ra>90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
3W

Outputvoltage:
3V

Outputcurrent:
600mA

OPTIC:
15°/24°/36°


Mainsvoltage:
DC24V

Description:
Magnetic rail spotlight

Cutout:
/

WSA0535DR







LightSource:
COB

Luminousflux:
500lm

CRI:
Ra>90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
5W

Outputvoltage:
9V

Outputcurrent:
500mA

OPTIC:
15°/24°/36°


Mainsvoltage:
DC24V


Description:
Magnetic rail spotlight

Cutout:
/

WSA0545DR







LightSource:
COB

Luminousflux:
700lm

CRI:
Ra>90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
9W

Outputvoltage:
18V

Outputcurrent:
400mA

OPTIC:
15°/24°/36°

Mainsvoltage:
DC24V

Description:
Magnetic rail spotlight


Cutout:
/

COLORS

BK

WLB0530NS








LightSource: LED
Material: Aluminum+PC
OPTIC: 100°
Luminousflux: 450lm
Power: 5W
Mainsvoltage: DC24V
CRI: Ra>80
Outputvoltage: 24V
Description: Magneticsuction
CCT: 2700K/3000K/4000K/5000K
Outputcurrent: /
Cutout: /

WLB0560NS








LightSource: LED
Material: Aluminum+PC
OPTIC: 100°
Luminousflux: 900lm
Power: 10W
Mainsvoltage: DC24V
CRI: Ra>80
Outputvoltage: 24V
Description: Magneticsuction
CCT: 2700K/3000K/4000K/5000K
Outputcurrent: /
Cutout: /

WLB0590NS







LightSource: LED
Material: Aluminum+PC
OPTIC: 100°
Luminousflux: 1300lm
Power: 15W
Mainsvoltage: DC24V
CRI: Ra>80
Outputvoltage: 24V
Description: Magneticsuction
CCT: 2700K/3000K/4000K/5000K
Outputcurrent: /
Cutout: /


COLORS

BK

W05MAGNETSYSTEMseries

WWB0513NR








LightSource: LED
Material: Aluminum
OPTIC: 100°
Luminousflux: 700lm
Power: 12W
Mainsvoltage: DC24V
CRI: Ra>80
Outputvoltage: 24V
Description: Magneticsuction
CCT: 2700K/3000K/4000K/5000K
Outputcurrent: /
Cutout: /

WWB0514NR








LightSource: LED
Material: Aluminum
OPTIC: 100°
Luminousflux: 1100lm
Power: 18W
Mainsvoltage: DC24V
CRI: Ra>80
Outputvoltage: 24V
Description: Magneticsuction
CCT: 2700K/3000K/4000K/5000K
Outputcurrent: /
Cutout: /

WPA0530NR-A








LightSource: COB
Material: Aluminum
OPTIC: 38°
Luminousflux: 500lm
Power: 5W
Mainsvoltage: DC24V
CRI: Ra>90
Outputvoltage: 36V
Description: Magneticsuction
CCT: 2700K/3000K/4000K/5000K
Outputcurrent: 120mA
Cutout: /

WWB0501B







LightSource: LED
Material: Aluminum
OPTIC: 360°
Luminousflux: 105lm
Power: 3W
Mainsvoltage: DC24V
CRI: Ra>90
Outputvoltage: 3V
Description: Magnetic glass ball
CCT: 2700K/3000K/4000K/5000K
Outputcurrent: 600mA
Cutout: /


COLORS

BK WH GY



WPA0540NR






High CRI IP20

LightSource: COB
Luminousflux: 500lm
CRI: Ra>90
CCT: 2700K/3000K/4000K/5000K

Material: Aluminum
Power: 7W
Outputvoltage: 36V
Outputcurrent: 150mA

OPTIC: 15°/24°/36°
Mainsvoltage: DC24V
Description: Magneticsuction
Cutout: /

WPA0518NR-A



High CRI IP20


LightSource: LED
Luminousflux: 180lm
CRI: Ra>90
CCT: 2700K/3000K/4000K/5000K

Material: Aluminum
Power: 3W
Outputvoltage: 3V
Outputcurrent: 600mA

OPTIC: 15°/24°/36°
Mainsvoltage: DC24V
Description: Magneticsuction
Cutout: /

WPA0518NR-B





High CRI IP20


LightSource: LED
Luminousflux: 180lm
CRI: Ra>90
CCT: 2700K/3000K/4000K/5000K

Material: Aluminum
Power: 5W
Outputvoltage: 9V
Outputcurrent: 450mA

OPTIC: 15°/24°/36°
Mainsvoltage: DC24V
Description: Magneticsuction
Cutout: /

WPA0518NR-C





High CRI IP20

LightSource: LED
Luminousflux: 180lm
CRI: Ra>90
CCT: 2700K/3000K/4000K/5000K

Material: Aluminum
Power: 3W
Outputvoltage: 3V
Outputcurrent: 600mA

OPTIC: 15°/24°/36°
Mainsvoltage: DC24V
Description: Magneticsuction
Cutout: /


COLORS

BK AU WH GY

W05MAGNETSYSTEMseries

WPA0518NR-D





High CRI IP20


LightSource: LED
Luminousflux: 180lm
CRI: Ra>90
CCT: 2700K/3000K/4000K/5000K

Material: Aluminum
Power: 3W
Outputvoltage: 3V
Outputcurrent: 600mA

OPTIC: 15°/24°/36°
Mainsvoltage: DC24V
Description: Magneticsuction
Cutout: /

WPB6560NR





High CRI IP20


LightSource: COB
Luminousflux: 450lm
CRI: Ra>90
CCT: 2700K/3000K/4000K/5000K

Material: Aluminum
Power: 5W
Outputvoltage: 9V
Outputcurrent: 450mA

OPTIC: 40°
Mainsvoltage: DC24V
Description: Magneticsuction
Cutout: /

WPB6208NR





High CRI IP20


LightSource: LED
Luminousflux: 180lm
CRI: Ra>90
CCT: 2700K/3000K/4000K/5000K

Material: Aluminum
Power: 3W
Outputvoltage: 3V
Outputcurrent: 600mA

OPTIC: 15°/24°/36°
Mainsvoltage: DC24V
Description: Magneticsuction
Cutout: /

WPB7080NR





High CRI IP20

LightSource: COB
Luminousflux: 450lm
CRI: Ra>90
CCT: 2700K/3000K/4000K/5000K

Material: Aluminum
Power: 5W
Outputvoltage: 9V
Outputcurrent: 450mA


OPTIC: 40°
Mainsvoltage: DC24V
Description: Magneticsuction
Cutout: /

COLORS

BK AU WH GY

WLB1030NS






High CRI IP20

LightSource: LED
Material: Aluminum
OPTIC: 100°
Luminousflux: 700lm
Power: 8W
Mainsvoltage: DC24V
CRI: Ra>80
Outputvoltage: 24V
Description: Magneticsuction
CCT: 2700K/3000K/4000K/5000K
Outputcurrent: /
Cutout: /

WLB1045NS






High CRI IP20

LightSource: LED
Material: Aluminum
OPTIC: 100°
Luminousflux: 1100lm
Power: 12W
Mainsvoltage: DC24V
CRI: Ra>80
Outputvoltage: 24V
Description: Magneticsuction
CCT: 2700K/3000K/4000K/5000K
Outputcurrent: /
Cutout: /

WLB1060NS






High CRI IP20

LightSource: LED
Material: Aluminum
OPTIC: 100°
Luminousflux: 1300lm
Power: 16W
Mainsvoltage: DC24V
CRI: Ra>80
Outputvoltage: 24V
Description: Magneticsuction
CCT: 2700K/3000K/4000K/5000K
Outputcurrent: /
Cutout: /

WLB1090NS





High CRI IP20


LightSource: LED
Material: Aluminum
OPTIC: 100°
Luminousflux: 2300lm
Power: 21W
Mainsvoltage: DC24V
CRI: Ra>80
Outputvoltage: 24V
Description: Magneticsuction
CCT: 2700K/3000K/4000K/5000K
Outputcurrent: /
Cutout: /

COLORS

BK

W05MAGNETSYSTEMseries

WYB0501NS




High CRI IP20

1000

LightSource: LED
Material: Silicone
OPTIC: 100°
Luminousflux: /
Power: 8W
Mainsvoltage: DC24V
CRI: Ra>80
Outputvoltage: 24V
Description: Light Strip
CCT: 3000K
Outputcurrent: /
Cutout: /


WYB0502NS




High CRI IP20

2000

LightSource: LED
Material: Silicone
OPTIC: 100°
Luminousflux: /
Power: 16W
Mainsvoltage: DC24V
CRI: Ra>80
Outputvoltage: 24V
Description: Light Strip
CCT: 3000K
Outputcurrent: /
Cutout: /

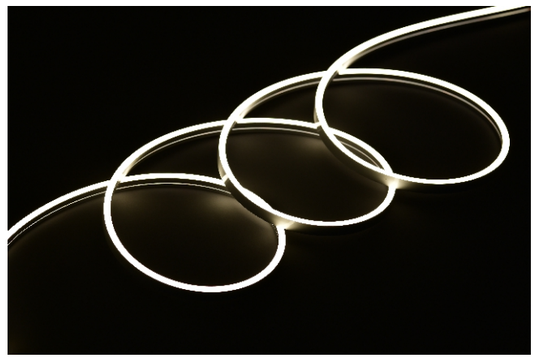

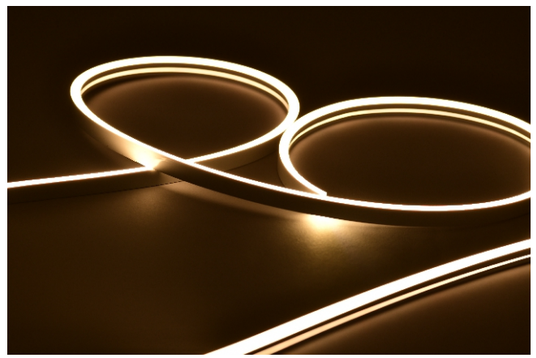


COLORS

WH

W05MAGNETSYSTEMseries

WLA1006NS





High CRI IP20


LightSource: LED
Luminousflux: 500lm
CRI: Ra>90
CCT: 2700K/3000K/4000K/5000K

Material: Aluminum
Power: 5W
Outputvoltage: 24V
Size: 146*10*H18mm

OPTIC: 30°
Mainsvoltage: DC24V
Description: Magneticsuction

WLA1012NS





High CRI IP20


LightSource: LED
Luminousflux: 1100lm
CRI: Ra>90
CCT: 2700K/3000K/4000K/5000K

Material: Aluminum
Power: 10W
Outputvoltage: 24V
Size: 242*10*H18mm

OPTIC: 30°
Mainsvoltage: DC24V
Description: Magneticsuction

WLA1018NS





High CRI IP20


LightSource: LED
Luminousflux: 1600lm
CRI: Ra>90
CCT: 2700K/3000K/4000K/5000K

Material: Aluminum
Power: 15W
Outputvoltage: 24V
Size: 337*10*H18mm

OPTIC: 30°
Mainsvoltage: DC24V
Description: Magneticsuction

WLA1024NS





High CRI IP20

LightSource: LED
Luminousflux: 2300lm
CRI: Ra>90
CCT: 2700K/3000K/4000K/5000K

Material: Aluminum
Power: 20W
Outputvoltage: 24V
Size: 391*10*H18mm


OPTIC: 30°
Mainsvoltage: DC24V
Description: Magneticsuction

COLORS

BK

WLA1506DS





High CRI IP20


LightSource: LED
Luminousflux: 221lm
CRI: Ra>90
CCT: 2700K/3000K/4000K/5000K

Material: Aluminum
Power: 6W
Outputvoltage: 24V
Size: 158*15*H85mm

OPTIC: 30°
Mainsvoltage: DC24V
Description: Magnetic spot light

WLA1512DS





High CRI IP20


LightSource: LED
Luminousflux: 430lm
CRI: Ra>90
CCT: 2700K/3000K/4000K/5000K

Material: Aluminum
Power: 12W
Outputvoltage: 24V
Size: 272*15*H85mm

OPTIC: 30°
Mainsvoltage: DC24V
Description: Magnetic spot light

WSA1006DS






High CRI IP20


LightSource: LED
Luminousflux: 221lm
CRI: Ra>90
CCT: 2700K/3000K/4000K/5000K

Material: Aluminum
Power: 6W
Outputvoltage: 24V
Size: 138*10.5*H64mm

OPTIC: 30°
Mainsvoltage: DC24V
Description: Magnetic spot light

WLA1512DS





High CRI IP20

LightSource: LED
Luminousflux: 430lm
CRI: Ra>90
CCT: 2700K/3000K/4000K/5000K

Material: Aluminum
Power: 12W
Outputvoltage: 24V
Size: 235*10.5*H64mm


OPTIC: 30°
Mainsvoltage: DC24V
Description: Magnetic spot light

COLORS

BK

WSA2601DR-A








LightSource: OSRAM
Luminousflux: 500Lm
CRI: Ra>90
CT: 2700K/3000K/4000K

Material: Aluminum
Power: 10W
Description: Magnetic rail spotlight
Size: Φ25x220mm

OPTIC: 24°/32°
Mainsvoltage: DC24V

WSA2602DR-A








LightSource: LED
Luminousflux: 750Lm
CRI: Ra>90
CT: 2700K/3000K/4000K

Material: Aluminum
Power: 12W
Description: Magnetic rail spotlight
Size: Φ35x220mm

OPTIC: 24°/36°
Mainsvoltage: DC24V

WSA2601DR-B








LightSource: LED
Luminousflux: 500Lm
CRI: Ra>90
CT: 2700K/3000K/4000K

Material: Aluminum
Power: 10W
Description: Magnetic rail spotlight
Size: Φ25x220mm

OPTIC: 24°/32°
Mainsvoltage: DC24V

WSA2602DR-B







LightSource: LED
Luminousflux: 750Lm
CRI: Ra>90
CT: 2700K/3000K/4000K

Material: Aluminum
Power: 12W
Description: Magnetic rail spotlight
Size: Φ35x220mm


OPTIC: 24°/36°
Mainsvoltage: DC24V

black White Brass Brushed silver grey

W05MAGNETSYSTEMseries

WSA0425DR








LightSource: LED
Luminousflux: /
CRI: Ra>90
CCT: 2700K/3000K/4000K/5000K


Material: Aluminum
Power: 3W
Size: Φ25x56mm

OPTIC: 24°/36°
Mainsvoltage: DC24V
Description: Vertically swingable 130° spotlight

WSA0435DR








LightSource: COB
Luminousflux: /
CRI: Ra>90
CCT: 2700K/3000K/4000K/5000K


Material: Aluminum
Power: 3W

OPTIC: 10°--55°
Mainsvoltage: DC24V
Description: Vertically swingable 130° spotlight

WSA0445DR







LightSource: COB
Luminousflux: /
CRI: Ra>90
CCT: 2700K/3000K/4000K/5000K

Material: Aluminum
Power: 3W
Size: Φ25x82mm

OPTIC: 18°/--35°
Mainsvoltage: DC24V
Description: Vertically swingable 130° spotlight




Focus adjustment

COLORS

BK

WWA0535NR-A







LightSource:
OSRAM

Luminousflux:
375Lm

CRI:
Ra>90

CT:
2700K/3000K/4000K

Material:
Aluminum

Power:
5W


Description:
Magnetic rail spotlight


Size:
Φ35

OPTIC:
24°/36°

Mainsvoltage:
DC24V

WWA0545NR-A







LightSource:
OSRAM

Luminousflux:
500Lm

CRI:
Ra>90

CT:
2700K/3000K/4000K

Material:
Aluminum

Power:
9W

Description:
Magnetic rail spotlight


Size:
Φ45mm


OPTIC:
24°/36°

Mainsvoltage:
DC24V

WSA0535DR-B







LightSource:
Birdgelux

Luminousflux:
375Lm

CRI:
Ra>90

CT:
2700K/3000K/4000K

Material:
Aluminum

Power:
5W


Description:
Magnetic rail spotlight


Size:
Φ35x58 mm


OPTIC:
15°/24°/36°

Mainsvoltage:
DC24V

WSA0545DR-B







LightSource:
Birdgelux

Luminousflux:
500Lm

CRI:
Ra>90

CT:
2700K/3000K/4000K

Material:
Aluminum

Power:
9W

Description:
Magnetic rail spotlight

Size:
Φ45x58 mm

OPTIC:
15°/24°/36°


Mainsvoltage:
DC24V


black White Brass Brushed silver grey

W05MAGNETSYSTEMseries

WSA0560DR







LightSource:
Bridgelux

Luminousflux:
380Lm

CRI:
Ra>90

CT:
2700K/3000K/4000K

Material:
Aluminum

Power:
7W

Description:
Magnetic rail spotlight


Size:
Φ60x42 mm


OPTIC:
15°/24°/36°

Mainsvoltage:
DC24V

WSA0580DR







LightSource:
Bridgelux

Luminousflux:
600Lm

CRI:
Ra>90

CT:
2700K/3000K/4000K

Material:
Aluminum

Power:
12W

Description:
Magnetic rail spotlight

Size:
Φ80x56 mm

OPTIC:
15°/24°/36°


Mainsvoltage:
DC24V



W05MAGNETSYSTEMseries

WPB1101B







LightSource:
OSRAM

CRI:
Ra>90

CT:
2700K/3000K/4000K

Material:
Aluminum

Power:
3W

Description:
Magnetic rail spotlight


OPTIC:
200°

Mainsvoltage:
DC24V

Size:
Φ60mm

WPB1102B







LightSource:
LED

CRI:
Ra>90

CT:
2700K/3000K/4000K

Material:
Aluminum

Power:
3W

Description:
Magnetic rail spotlight


OPTIC:
200°

Mainsvoltage:
DC24V

Size:
Φ80mm

WPB1103B







LightSource:
LED

CRI:
Ra>90

CT:
2700K/3000K/4000K

Material:
Aluminum

Power:
5W

Description:
Magnetic rail spotlight


OPTIC:
200°

Mainsvoltage:
DC24V

Size:
Φ100mm

WPB1104B







LightSource:
LED

CRI:
Ra>90

CT:
2700K/3000K/4000K

Material:
Aluminum

Power:
5W

Description:
Magnetic rail spotlight

OPTIC:
200°


Mainsvoltage:
DC24V


Size:
Φ120mm

White



WLA0514NS-A







LED brand:
SANAN

CCT:
2700K/3000K/4000K

Mainsvoltage:
DC24V

Size:
145x5x10.5mm

Power:
3W


Material:
Aluminium


OPTIC:
50°

CRI:
Ra>90

Description:
grille light

WLA0514NS-B







LED brand:
OSRAM

CCT:
2700K/3000K/4000K

Mainsvoltage:
DC24V

Size:
145x5x10.5 mm

Power:
3W

Material:
Aluminium


OPTIC:
40°

CRI:
Ra>90

Description:
grille light

WLA0528NS-A







LED brand:
SANAN

CCT:
2700K/3000K/4000K

Mainsvoltage:
DC24V

Size:
245x5x10.5 mm

Power:
6W


Material:
Aluminium


OPTIC:
50°

CRI:
Ra>90

Description:
grille light

WLA0528NS-B







LED brand:
OSRAM

CCT:
2700K/3000K/4000K

Mainsvoltage:
DC24V

Size:
245x5x10.5mm

Power:
6W


Material:
Aluminium


OPTIC:
40°


CRI:
Ra>90

Description:
grille light

WLA0542NS-A







LED brand:
SANAN

CCT:
2700K/3000K/4000K

Mainsvoltage:
DC24V

Size:
345x5x10.5mm

Power:
9W


Material:
Aluminium


Beam angle:
50°


CRI:
Ra>90

Description:
grille light

WLA0542NS-B







LED brand:
OSRAM

CCT:
2700K/3000K/4000K

Mainsvoltage:
DC24V

Size:
345x5x10.5mm

Power:
9W


Material:
Aluminium


Beam angle:
40°

CRI:
Ra>90

Description:
grille light

WLA0556NS-A







LED brand:
OSRAM

CCT:
2700K/3000K/4000K

Mainsvoltage:
DC24V

Size:
445x5x10.5mm

Power:
12W


Material:
Aluminium


Beam angle:
50°

CRI:
Ra>90

Description:
grille light

WLA0556NS-B







LED brand:
OSRAM

CCT:
2700K/3000K/4000K

Mainsvoltage:
DC24V

Size:
445x5x10.5mm

Power:
12W

Material:
Aluminium

Beam angle:
40°

CRI:
Ra>90

Description:
grille light

black

black