www.jingyinglight.com

GUANDONG JINGYING LIGHTING CO.,LTD
广东精颖灯饰有限公司

广东省中山市古镇镇华艺广场1楼9-10卡
No.9-10 lst Floor , Huayi plaza Guzhen Town, Zhongshan City,
Guangdong Priovince

TEL:+86-760-89833225

JINGYING
lighting

S15

2023
PRODUCT CULTURE

LIGHT
FOR THE FUTURE

JINGYING
lighting



ABOUTUS

精颖品牌简介

精颖品牌创立于 2009 年，是一家专注 LED 现代灯产业的供应商和知名品牌商，业务遍布全球 130 个国家及城市。

凭借着创始人和团队深厚的商业照明底蕴，精颖自创立之初就提出了光学艺术化的理念，将光学设计和灯饰设计融合一体化，将商照的功能性专业性与灯饰的设计感和艺术美感相结合。

精颖总部坐落于广东省江门国家高新技术工业区，拥有 30000 多平方米国际高标准的生产制造基地、五级品质管理体系、科学系统的营销管理模式，并在丹麦，意大利建立了跨国研发设计室，汇集数百名行业资深的的灯饰产品研发专家和生产工艺管理精英，公司荣获 50 余项产品专利，通过 ISO9001:2000 国际质量体系、欧盟 CE、ROHS、中国国家 CCC 强制证等国内外权威认证。并且建立了完整的产品线，匠心打造七大系列近千款产品，涵盖吊线灯、吸顶、墙壁、镜前灯、台灯、落地灯个墙角灯、庭院灯、商业照明等全系列精品灯饰，致力于光学艺术照明在家居、酒店及商业领域的广泛应用。

2018 年，精颖提出了“光临未来”品牌战略，视野更加国际化，积极与国外研究机构合作，进一步深度挖掘光学在灯饰中的表现形式，同时在设计理念上更加的前卫与创新，积极运用新的材料新的设计新的工艺现光的艺术，引领探索光与艺术更辽阔的未来。

Jingying, established in 2009.is a supplier and notable dealer in the LED modern lighting industry whose business scope covers 130 countries and cities globally. By virtue of the profound commercial accomplishments of both the founder and the team. Jingying has offered the idea of optical art since inception, integrated light source designs and lighting designs. and combined the functions of lighting with art.

Jingying ` s headquarters is located in Jiangmen ' s National Hi-Tech Zone in Guang-dong.With a production base larger that 30000 Spuare meters that meets interna-tional standsrds, it is also favored with a quality management system with five levels and a scientific.systematic marking management mode.Jingying has set up R&D offices in Denmark and Ltaly.gathered hundreds of lighting R&D experts experts and excel-been certified by ISO9001:2000 international quality system,CE,ROHS,CCC and other domestic and international authorities. Equipped with a complete pro-duction line.the company has developed about 1000 products that fit into seven Major categories:chandeliers,ceiling lamps.wall lamps,mirror lamps,desk desk lamps.

floor and corner lamps, and bollards light,Commercial lighting.The company has been broadly applying its concepts of artistic lighting in households,hotels. and commercial areas. In2018,Jingying developed the brand strategy Light of the Future.whice broad-ened our intermational vision and led us to seek for cooperation with international research institutes.

all the while further exploring modes of expression in optical lighting design. Jingying also

continued to pursue innovating and applying new ma terials.new designs,and new techniques

in optical art.pioneering a greater future of lighting and art.



Encounter the Beauty of Craftsmanship

卢梭曾说，在人类所有的职业中，工艺是一门最古老最正直的手艺。工艺在人的成长中功用最大，在物品的制造中通过手将触觉、视觉和脑力相协调，身心合一，使人得到健康成长。而在这超时间、跨领域、跨时代的技艺里，有着世代手艺人的坚守与专注，他们拾起身体和工具的技艺，触摸那些有真实代入感的生活。

Rousseau once said that in all human professions,craftsman is the oldest and most upright.Technology plays the most important role in the growth of human beings.In the manufacture of goods,touch,vision and brains are coordinated by hand,and the body and mind are integrated,so that people can grow healthily.In this time-consuming,cross-domain and cross-generational skill,there are generations of craftsmen who stick to and concentrate on picking up the memory of their bodies and tools and touching the real life.

From Modern Design To craftsmanship

从现代设计到手工工艺

在精颖的工艺中既有现代化的生产工艺，也有纯粹的手工工艺，从灵感的灵光一现到作品的最终呈现，精颖的每一件作品要经理生产，检测合计七十三道工序，每一道工序都是一件精颖艺术品不可或缺的主角。

In the exquisite craftsmanship,there are both modern production techniques and pure handicrafts. From the inspiration to the final presentation of the works,each pieces works of Jingying lighting through 73 processes of production and tests . Every process is indispensable.





Wonderful

精彩工艺 精彩纷呈


在精颖的工艺中既有现代化的生产工艺，也有纯粹的手工工艺，从灵感的灵光一现到作品的最终呈现，精颖的每一件作品要经理生产，检测合计七十三道工序，每一道工序都是一件精颖艺术品不可或缺的主角。

In the exquisite craftsmanship,there are both modern production techniques and pure handicrafts. From the inspiration to the final presentation of the works,each pieces works of Jingying lighting through 73 processes of production and tests . Every process is indispensable.



S15 series

TRACK

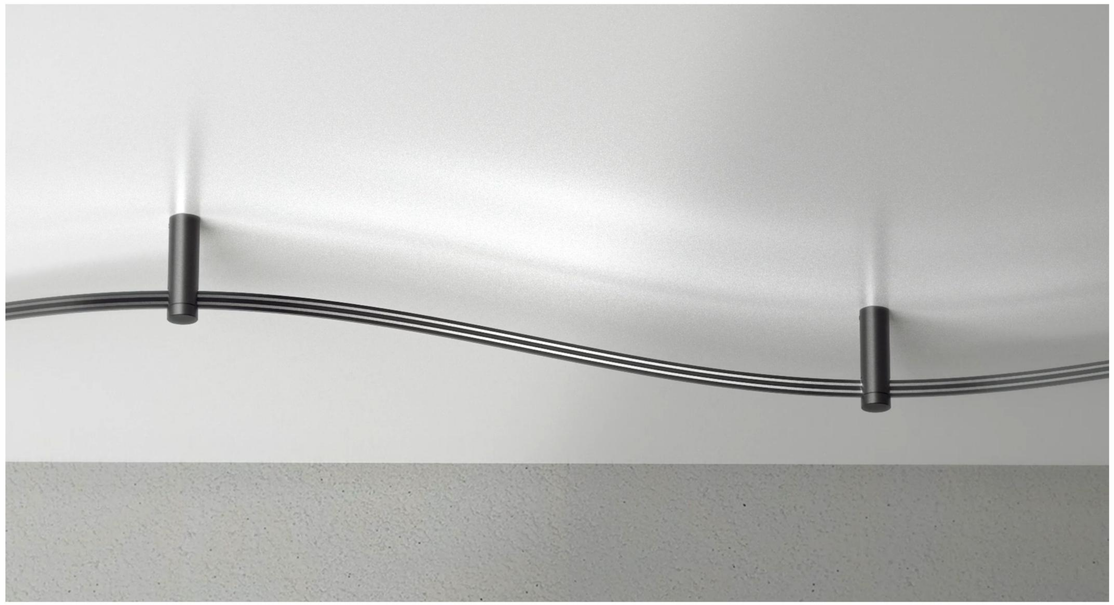

MODEL NO.	Input	Material	Size(mm)	Description
S15T-5M	DC 48V	PC + Copper + Stainless Steel	L5000xW15xH3.5mm	Soft track 5M


COLORS

BK



TRACK PARTS






COLORS

BK

MODEL NO.	Input	Material	Size(mm)	Description
S15T-E00	48V	PC	42x21x13 mm	Track Input Conductive Module






COLORS

BK

MODEL NO.	Input	Material	Size(mm)	Description
S15T-E01	48V	PC	(42x21x13) x2 mm	Track Connecting String Conductive Modules (Wire length 0.1m)






COLORS

BK

MODEL NO.	Input	Material	Size(mm)	Description
S15T-E02	48V	PC	42x21x13 mm	Track Connecting String Conductive Modules






COLORS

BK

MODEL NO.	Input	Material	Size(mm)	Description
S15T-END	/	PC	18x15x6.5 mm	Orbital Tail Plugs

TRACK PARTS






COLORS

BK

MODEL NO.	Input	Material	Size(mm)	Description
S15T-W01	48V	Aluminium	∅26x65 mm	Rail Ceiling Assembly






COLORS

BK


MODEL NO.	Input	Material	Size(mm)	Description
S15T-W02	48V	Aluminium	∅60x60 mm	Rail Ceiling Assembly (Can be connected to electricity at the bottom)

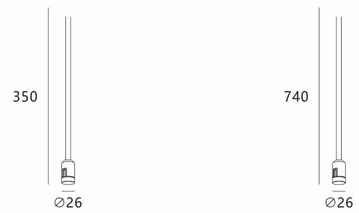


COLORS

BK

MODEL NO.	Input	Material	Size(mm)	Description
S15T-P300	48V	Aluminium	∅26x350 mm	Rail Boom Line Assemblies
S15T-P700	48V	Aluminium	∅26x740 mm	






COLORS


BK

MODEL NO.	Input	Material	Size(mm)	Description
S15T-B01	220-240V	Cutter	275x58x50 mm	Rail Ceiling Input Power Box (Without driver)


Minimum curvature radius

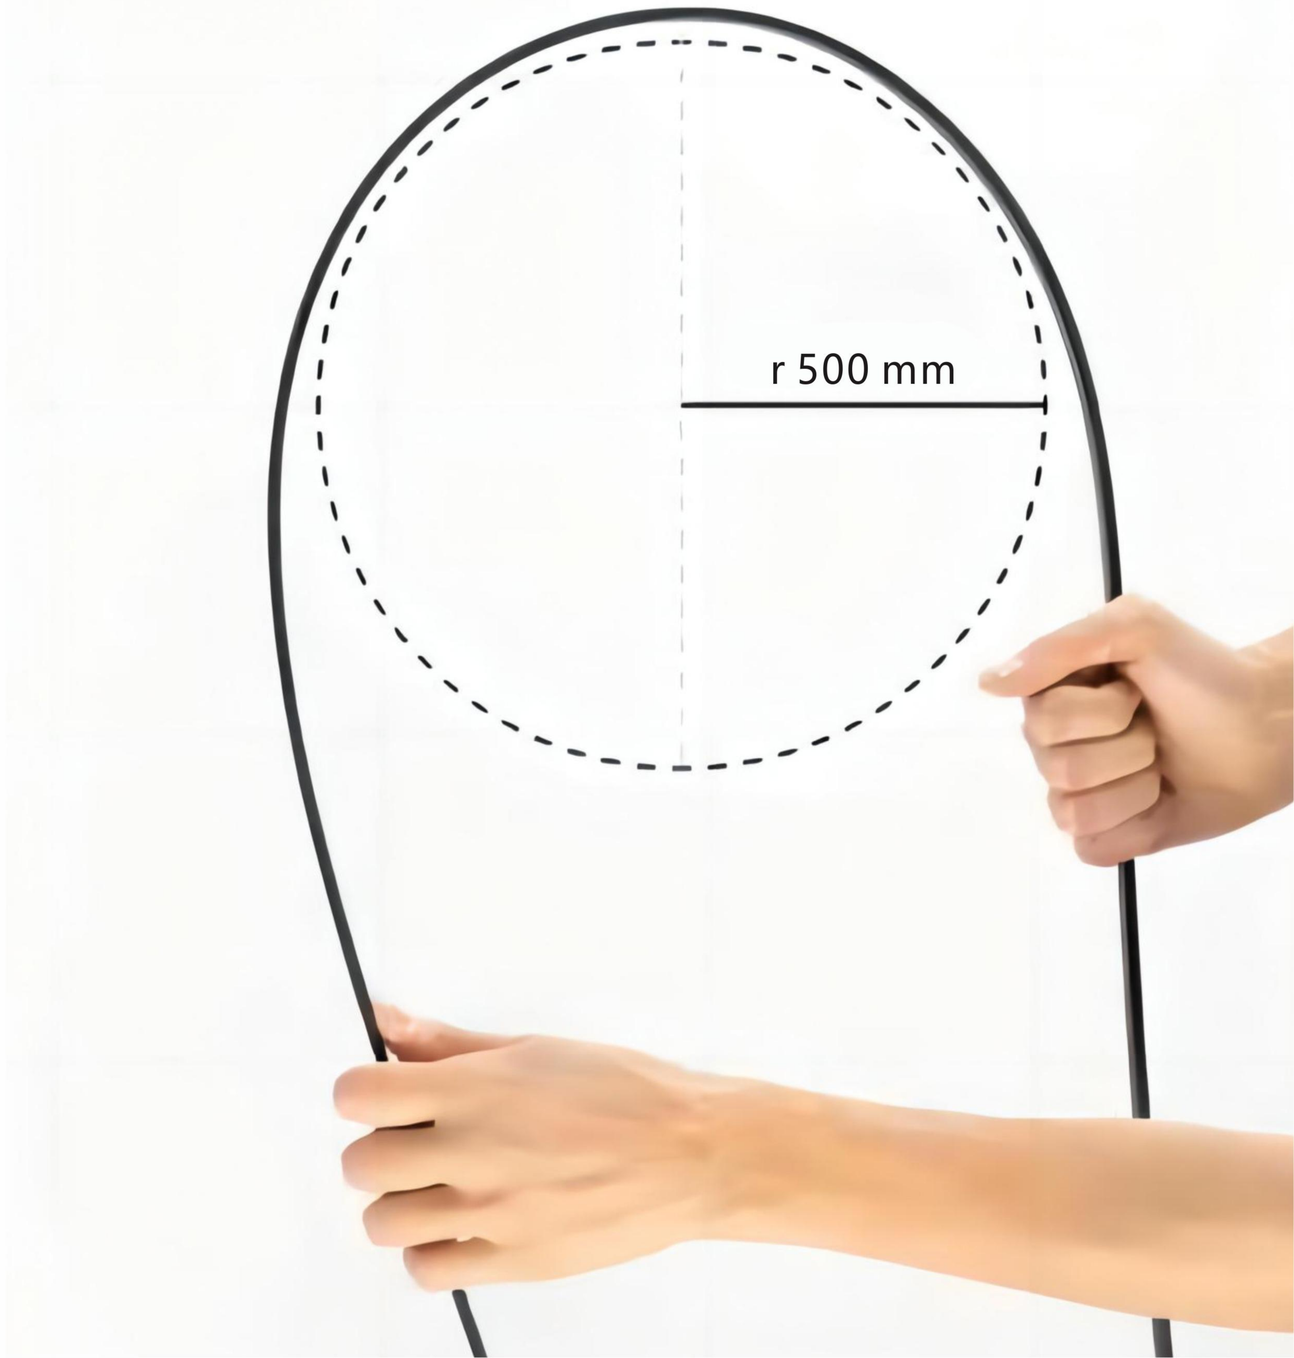

S15 series

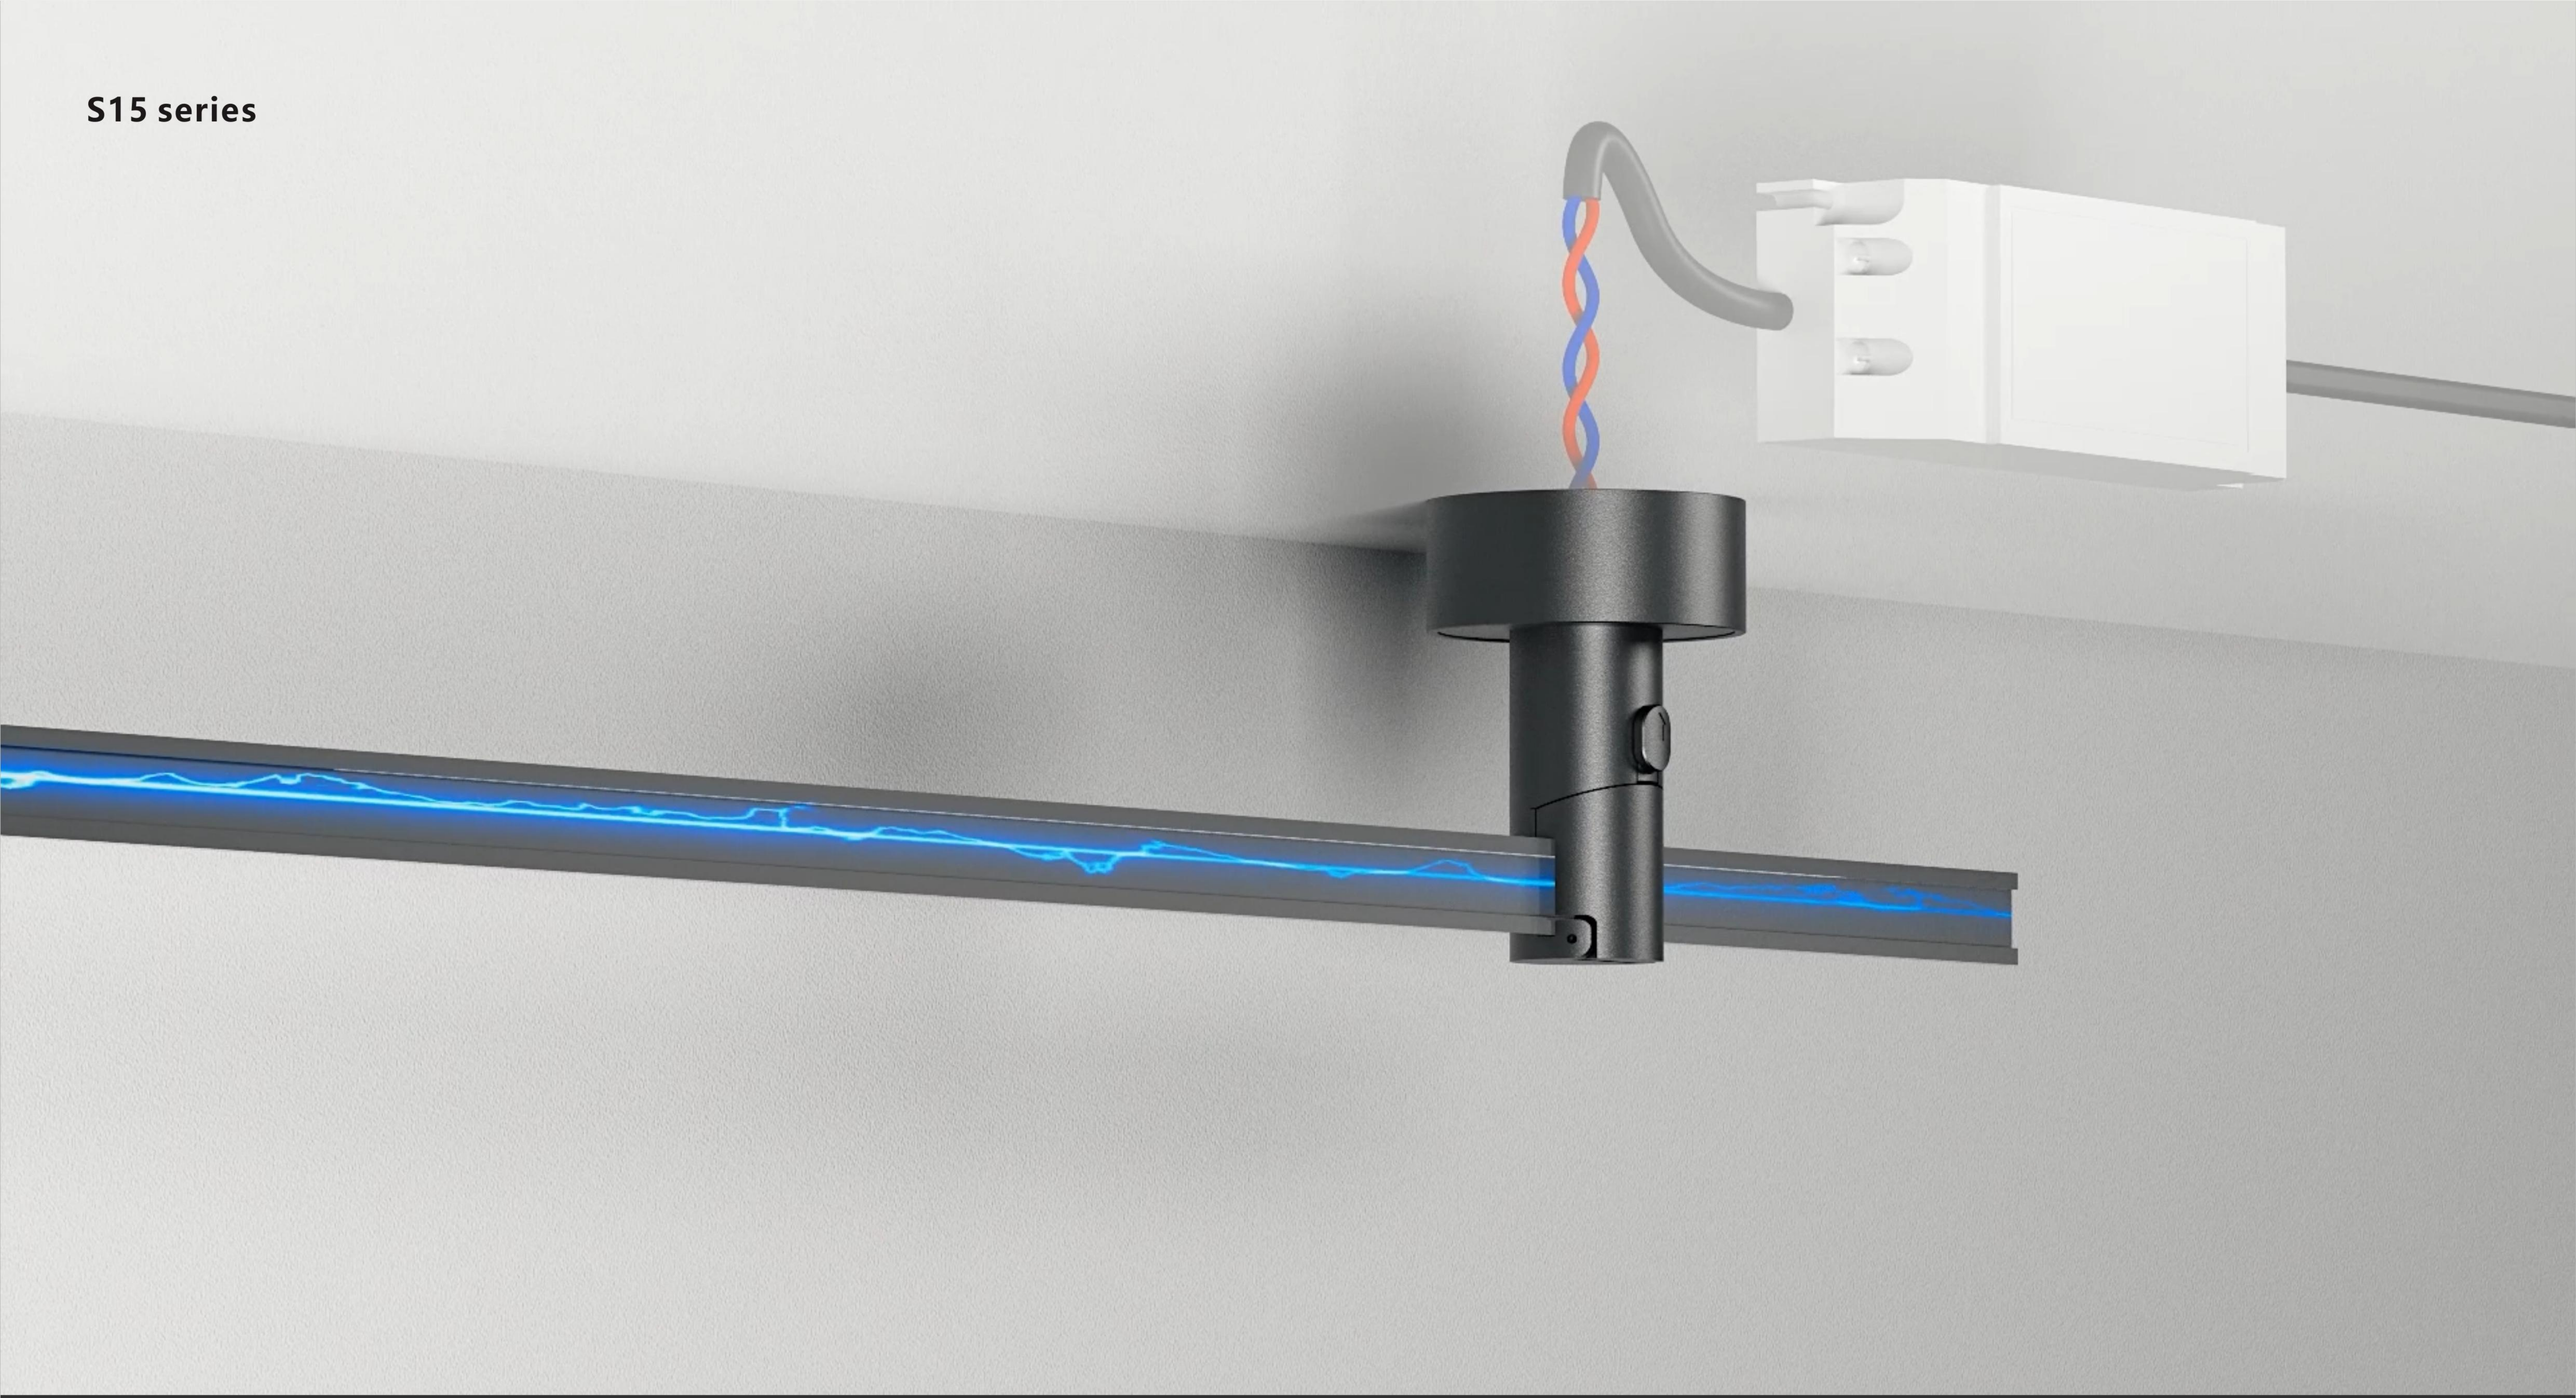

Hidden power supply for better appearance

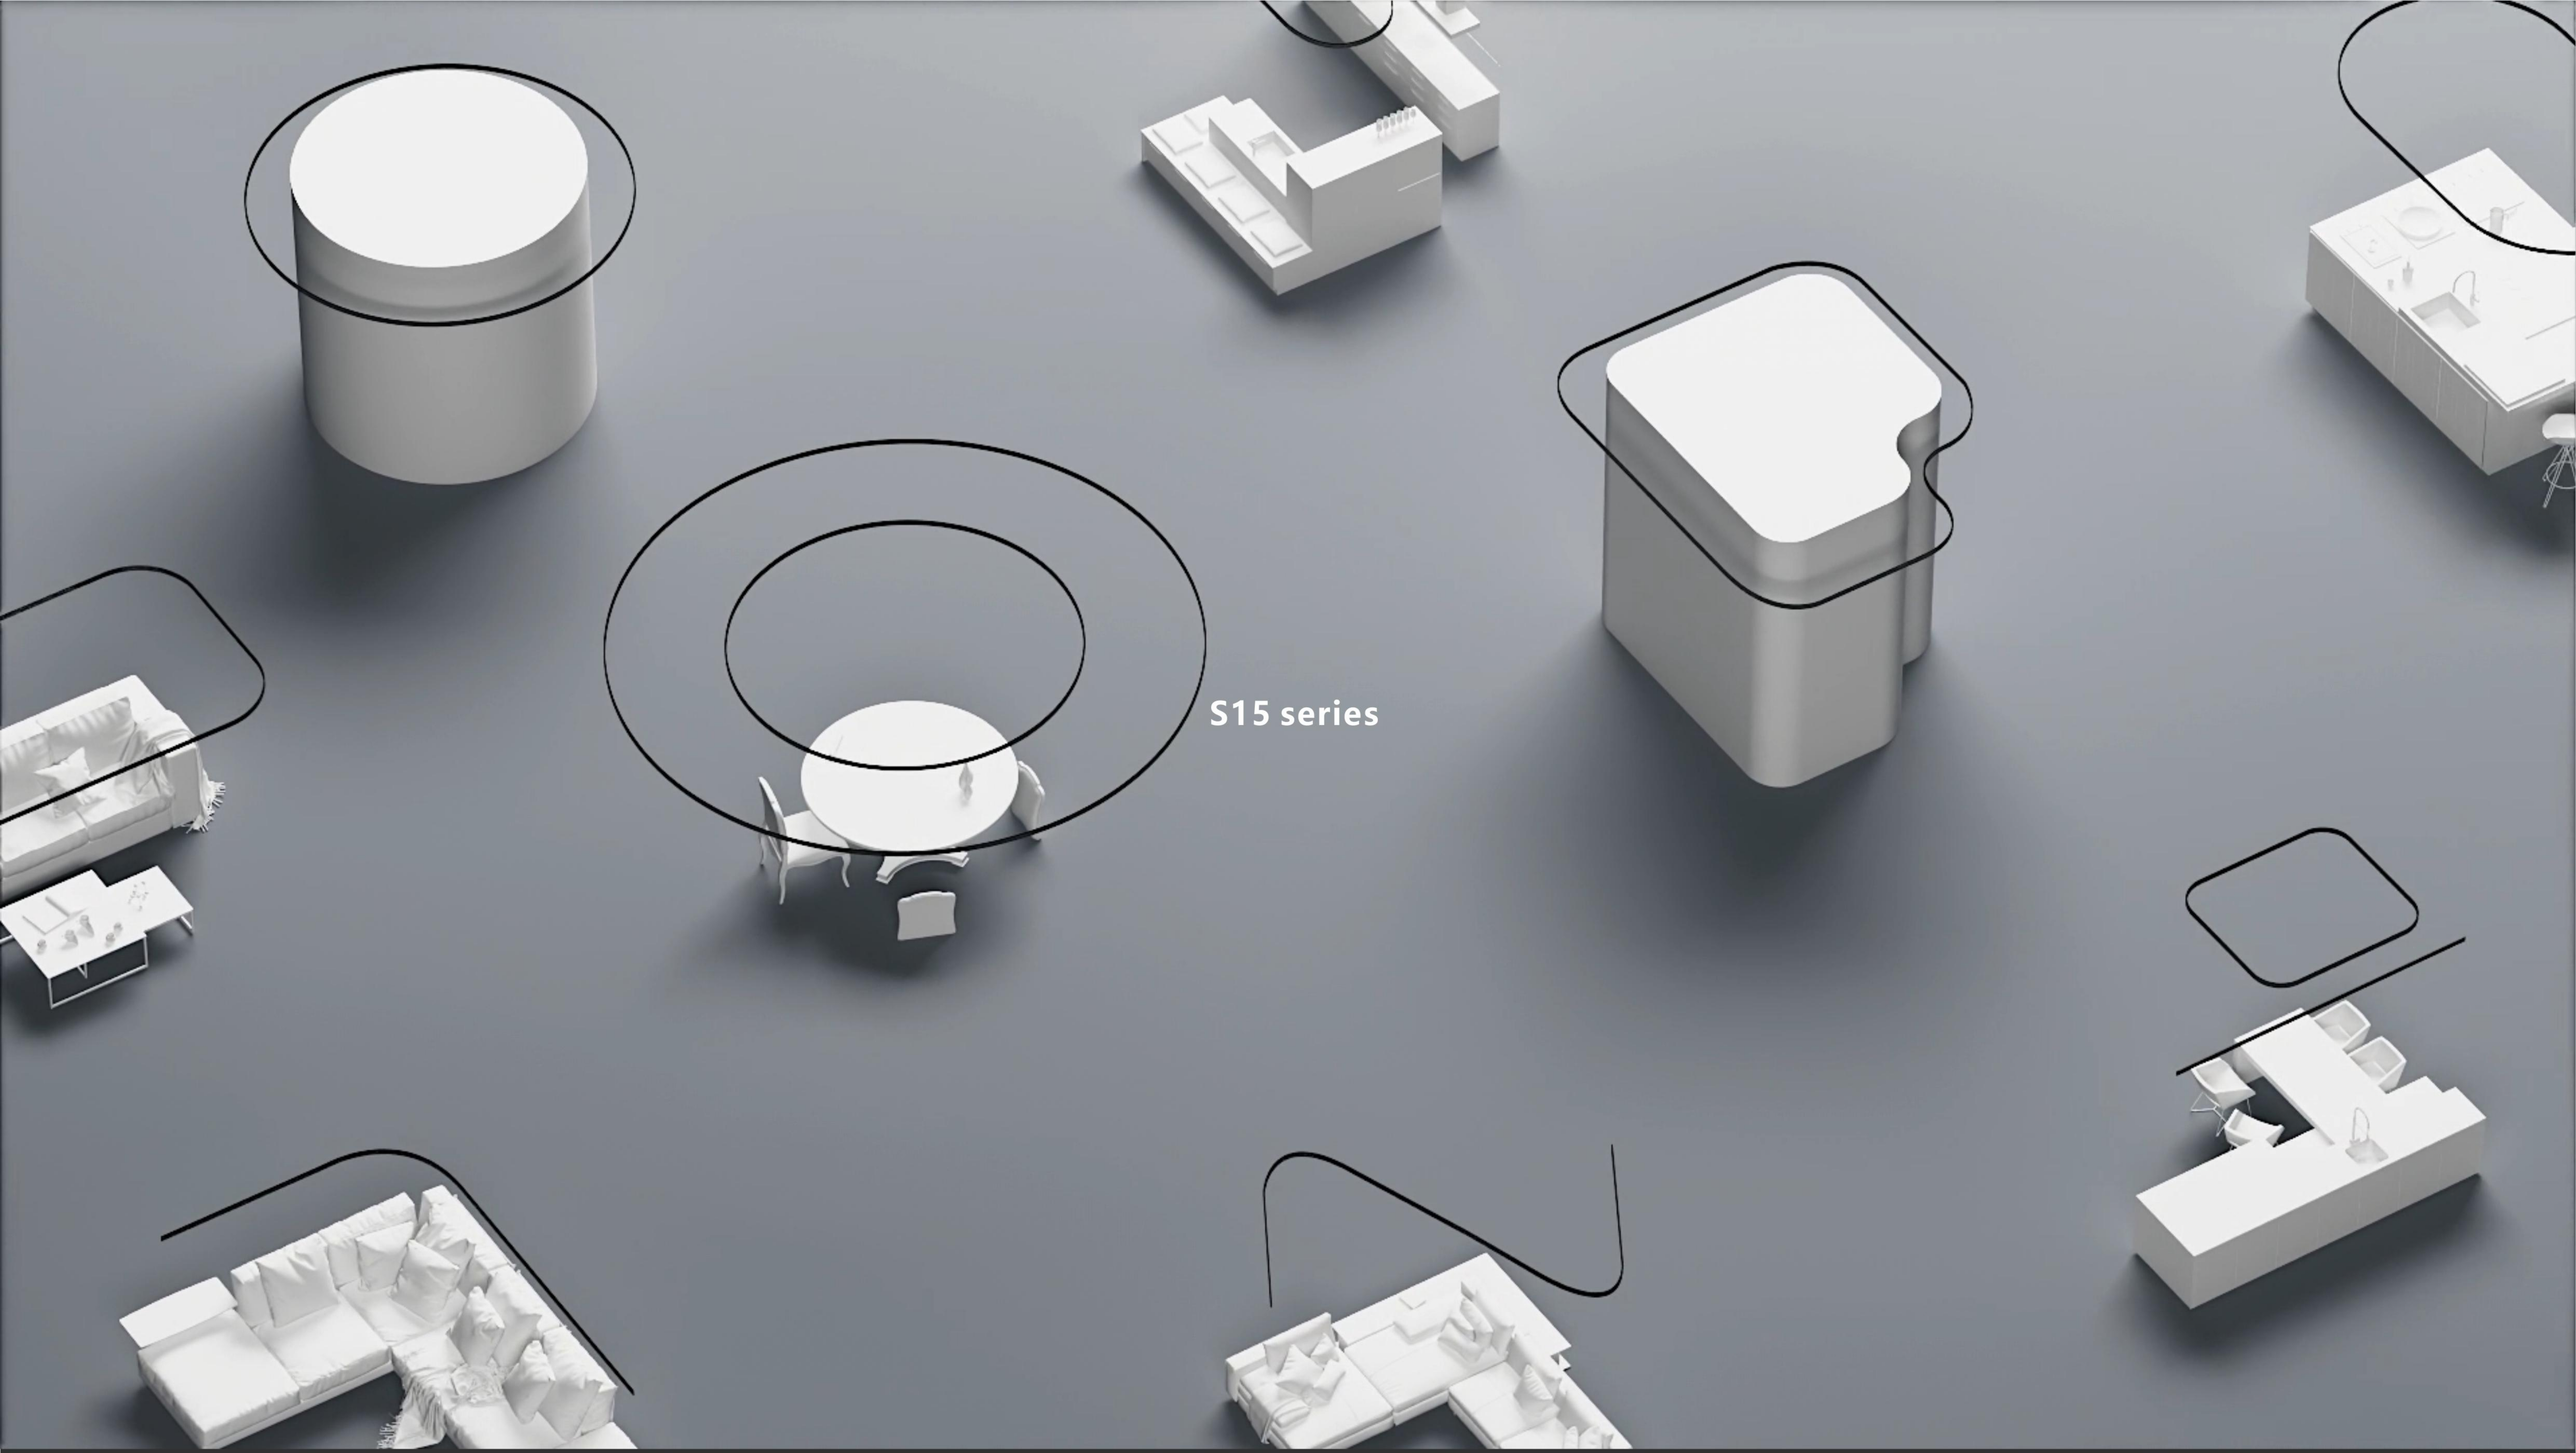


Flexible and soft
free to match adapt to different scene needs

S15 series



SSA1535DR







LightSource:
COB

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
36V 150mA

Size:
∅35*80mm

Power:
7W

Material:
Aluminium


OPTIC:
15°/24°/36°

CRI:
Ra>90

Description:
Track Spotlight

SSA1545DR







LightSource:
COB

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
36V 250mA

Size:
∅45*100mm

Power:
10W

Material:
Aluminium


OPTIC:
15°/24°/36°

CRI:
Ra>90

Description:
Track Spotlight

SSA1560DR







LightSource:
COB

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
36V 350mA

Size:
∅60*120mm

Power:
15W

Material:
Aluminium


OPTIC:
15°/24°/36°

CRI:
Ra>90

Description:
Track Spotlight

SLB1514NR







LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
142*35*85mm

Power:
5W

Material:
Aluminium

OPTIC:
100°

CRI:
Ra>90


Description:
Fixed floodlights

COLORS

BK

SLB1528NR







LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
275*35*85mm

Power:
10W

Material:
Aluminium


OPTIC:
100°

CRI:
Ra>90

Description:
Fixed floodlights

SLA1505NR







LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
142*35*85 mm

Power:
5W

Material:
Aluminium


OPTIC:
24°

CRI:
Ra>90

Description:
Fixed grille light

SLA1510NR







LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
270*35*85 mm

Power:
10W

Material:
Aluminium


OPTIC:
24°

CRI:
Ra>90

Description:
Fixed grille light

SSB1514DR







LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
142*35*117mm

Power:
5W

Material:
Aluminium

OPTIC:
100°

CRI:
Ra>90

Description:
Swivel Floodlight


COLORS

BK

S15 Series

SSB1528DR







LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
275*35*117mm

Power:
10W

Material:
Aluminium


OPTIC:
100°

CRI:
Ra>90

Description:
Swivel Floodlight

SSA1505DR







LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
142*35*117 mm

Power:
5W

Material:
Aluminium


OPTIC:
24°

CRI:
Ra>90

Description:
Shaker Grille Lamp

SSA1510DR







LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
270*35*117 mm

Power:
10W

Material:
Aluminium


OPTIC:
24°

CRI:
Ra>90

Description:
Shaker Grille Lamp

SWA1524NR-A







LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
276*118*70mm

Power:
24W

Material:
Aluminium

OPTIC:
60°/90°

CRI:
Ra>90


Description:
Fixed grille light

COLORS

BK

SSA1524DR-A







LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
276*118*102mm

Power:
24W

Material:
Aluminium


OPTIC:
60°/90°

CRI:
Ra>90

Description:
Shaker Grille Lamp

SSA1524NR-B







LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
506*118*102 mm

Power:
12W*2

Material:
Aluminium


OPTIC:
60°/90°

CRI:
Ra>90

Description:
Fixed grille light without backlight

SSD1524NR-B







LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
506*118*102mm

Power:
Downward LED 12W*2
Upper LED 8W

Material:
Aluminium


OPTIC:
60°/90°

CRI:
Ra>90

Description:
Backlit Fixed Grille Lamp

SWA1548NR







LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
1006*118*70 mm

Power:
18W*2

Material:
Aluminium

OPTIC:
60°/90°

CRI:
Ra>90


Description:
Fixed grille light without backlight

COLORS

BK

SWD1548NR







LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
1006*118*70 mm

Power:
Downward LED 18W*2
Upper LED 15W

Material:
Aluminium


OPTIC:
60°/90°

CRI:
Ra>90

Description:
Backlit Fixed Grille Lamp

SWA1536NR







LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
1006*118*70 mm

Power:
12W*3

Material:
Aluminium

OPTIC:
60°/90°

CRI:
Ra>90

Description:
Fixed grille light without backlight

SWB1513NR







LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
∅113*87mm

Power:
12W

Material:
Aluminium


OPTIC:
100°

CRI:
Ra>90

Description:
Fixed floodlights

SWB1514NR







LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
∅138*87mm

Power:
20W

Material:
Aluminium

OPTIC:
100°

CRI:
Ra>90


Description:
Fixed floodlights

COLORS

BK

SWB1501NR-A







LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
∅100*156 mm

Power:
5W

Material:
Glass

OPTIC:
100°

CRI:
Ra>90

Description:
Fixed

SWB1501NR-B







LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
∅118*131mm

Power:
5W

Material:
Glass


OPTIC:
100°

CRI:
Ra>90

Description:
Fixed

SWB1501NR-C







LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
∅50*160mm

Power:
3W

Material:
Glass


OPTIC:
100°

CRI:
Ra>90

Description:
Fixed

SWB1502NR







LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
∅60*120mm

Power:
3W

Material:
Glass

OPTIC:
200°

CRI:
Ra>90

Description:
Fixed


COLORS

WH

S15 Series

SWB1503NR





High CRI IP20


LightSource: LED
CCT: 2700K/3000K/4000K/5000K
Input(V): 48V
Voltage & Current: 48V

Size: ∅80*120mm
Power: 3W
Material: Glass

OPTIC: 200°
CRI: Ra>90
Description: Fixed

SWB1504NR





High CRI IP20


LightSource: LED
CCT: 2700K/3000K/4000K/5000K
Input(V): 48V
Voltage & Current: 48V

Size: ∅100*160mm
Power: 5W
Material: Glass

OPTIC: 200°
CRI: Ra>90
Description: Fixed

SWB1505NR






High CRI IP20

LightSource: LED
CCT: 2700K/3000K/4000K/5000K
Input(V): 48V
Voltage & Current: 48V

Size: ∅120*180mm
Power: 5W
Material: Glass

OPTIC: 200°
CRI: Ra>90
Description: Fixed

SPB1502NR



High CRI IP20

LightSource: LED
CCT: 2700K/3000K/4000K/5000K
Input(V): 48V
Voltage & Current: 48V


Size: ∅60mm
Power: 3W
Material: Glass

OPTIC: 200°
CRI: Ra>90
Description: Chandelier version

COLORS

BK WH

SPB1504NR




High CRI IP20

LightSource: LED
CCT: 2700K/3000K/4000K/5000K
Input(V): 48V
Voltage & Current: 48V

Size: ∅100 mm
Power: 5W
Material: Glass

OPTIC: 200°
CRI: Ra>90
Description: Chandelier version

SPB1505NR



High CRI IP20


LightSource: LED
CCT: 2700K/3000K/4000K/5000K
Input(V): 48V
Voltage & Current: 48V

Size: ∅120mm
Power: 5W
Material: Glass

OPTIC: 200°
CRI: Ra>90
Description: Chandelier version

SPA4030NR-A





High CRI IP20


LightSource: LED
CCT: 2700K/3000K/4000K/5000K
Input(V): 48V
Voltage & Current: 36V 120mA

Size: ∅40*300 mm
Power: 5W
Material: Aluminium

OPTIC: 15°/24°/36°
CRI: Ra>90
Description: Chandelier version

SPA5030NR-A





High CRI IP20

LightSource: LED
CCT: 2700K/3000K/4000K/5000K
Input(V): 48V
Voltage & Current: 36V 250mA

Size: ∅50*300 mm
Power: 10W
Material: Aluminium


OPTIC: 15°/24°/36°
CRI: Ra>90
Description: Chandelier version

COLORS

BK WH

SLS1522-1M





High CRI | IP20

LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
∅22*1000 mm

Power:
16W

Material:
PC


OPTIC:
360°

CRI:
Ra>90

Description:
Flexible Light Bar

SLS1522-2M





High CRI | IP20

LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
∅22*2000mm

Power:
32W

Material:
PC


OPTIC:
360°

CRI:
Ra>90

Description:
Flexible Light Bar

SLS1522-3M





High CRI | IP20

LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
∅22*3000mm

Power:
48W

Material:
PC

luminous flux:
2835 lm

OPTIC:
360°

CRI:
Ra>90

Description:
Flexible Light Bar

COLORS

WH






S15 series

JINGYING
lighting

S15 series

S15 series

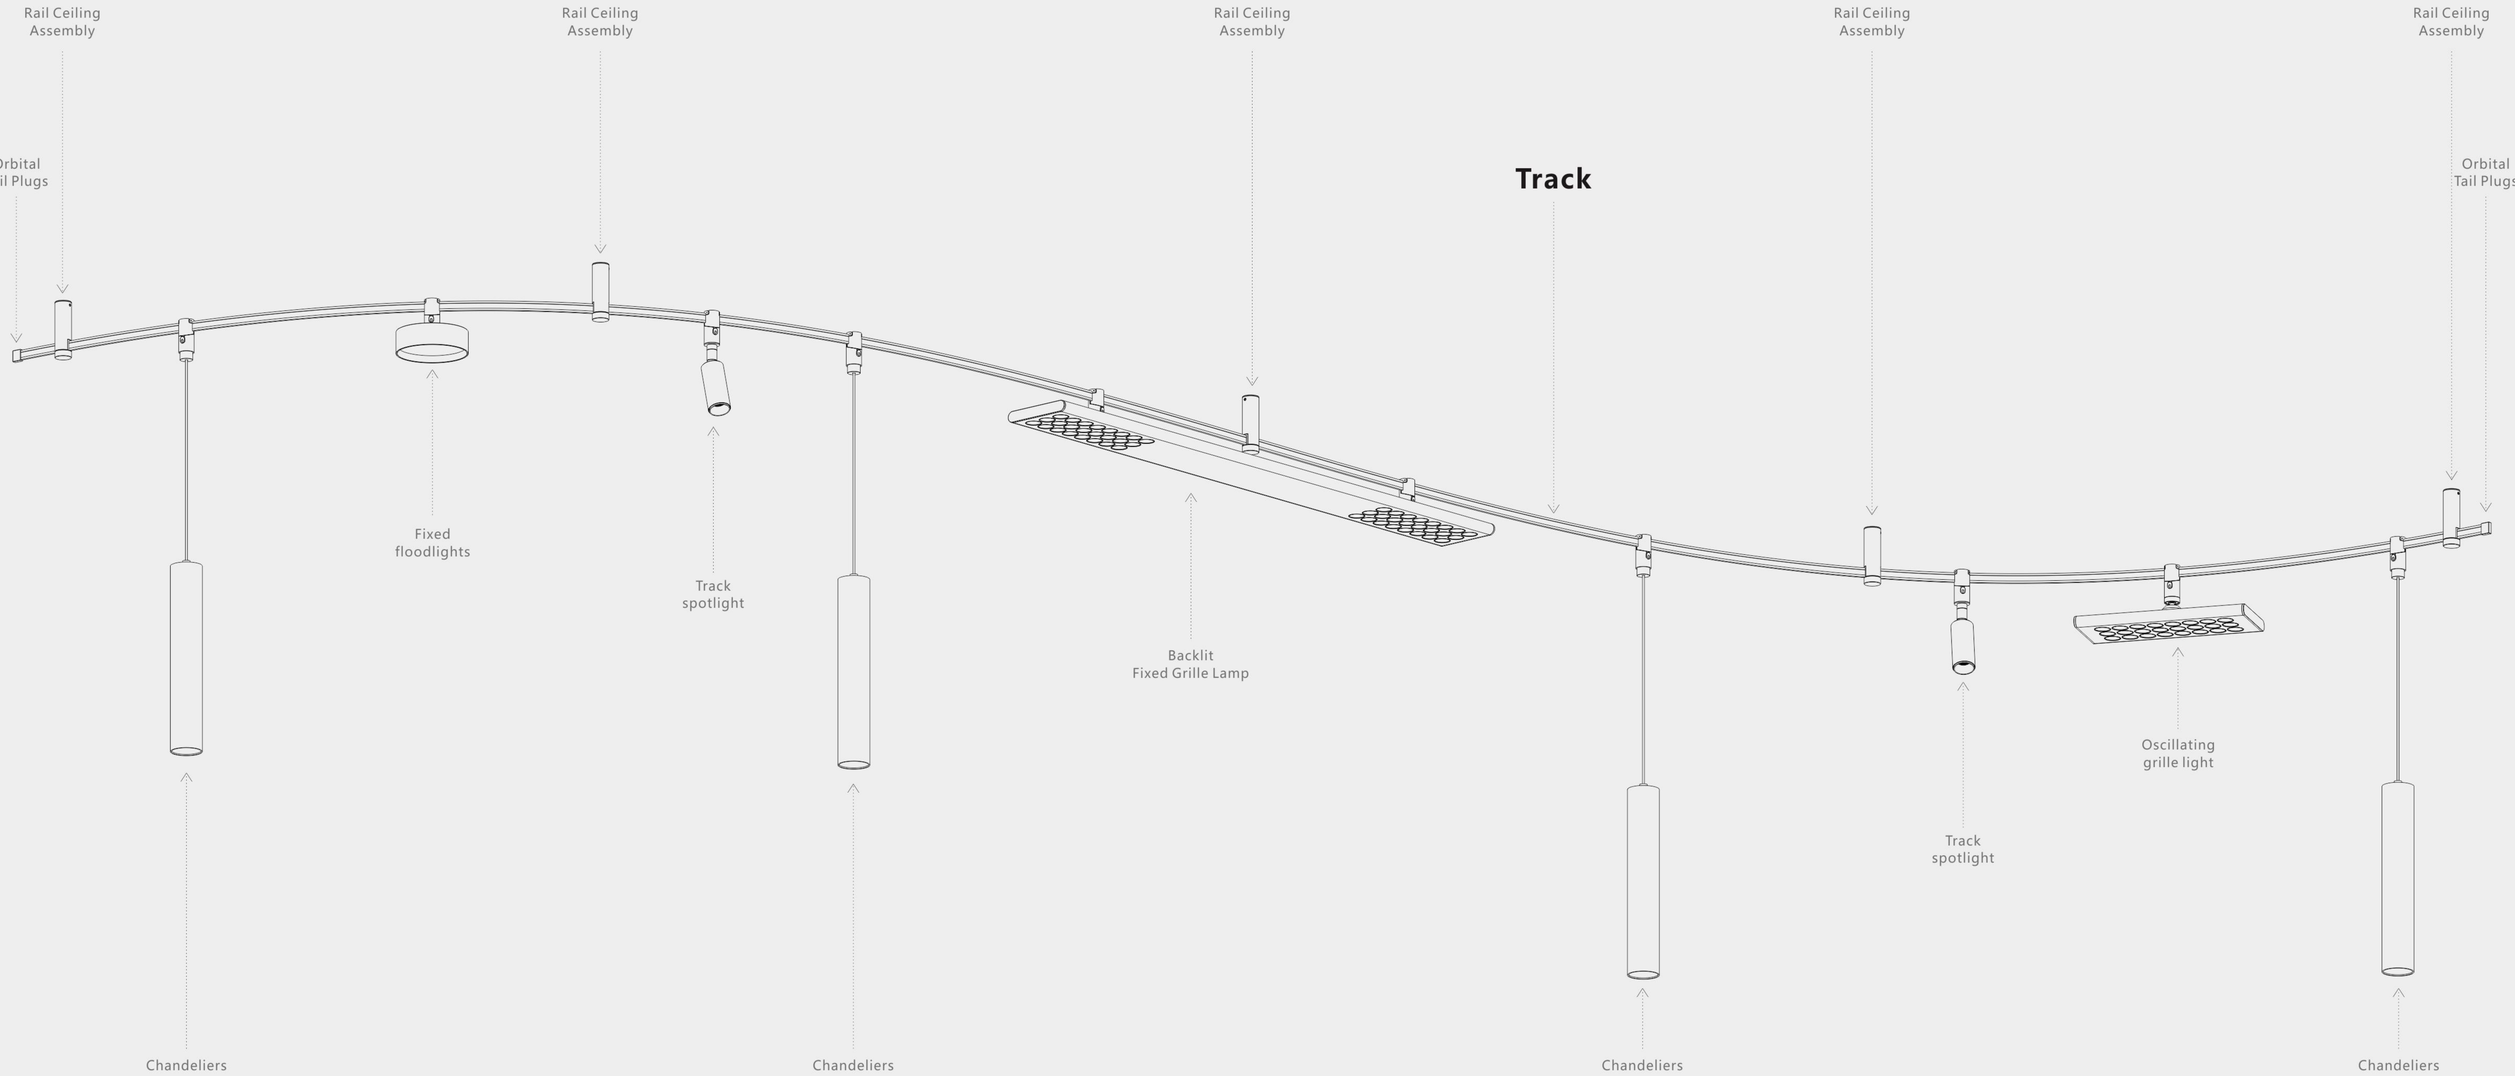
Rail Ceiling Assembly
Rail Ceiling Assembly
Rail Ceiling Assembly
Rail Ceiling Assembly
Rail Ceiling Assembly
Track
Orbital Tail Plugs
Orbital Tail Plugs
Fixed floodlights
Track spotlight
Backlit Fixed Grille Lamp
Oscillating grille light
Track spotlight
Chandeliers
Chandeliers
Chandeliers
Chandeliers




JINGYING
lighting