
KELVIN & WATTS


VERSION 3.0

LOOKBOOK

2025 - 2026

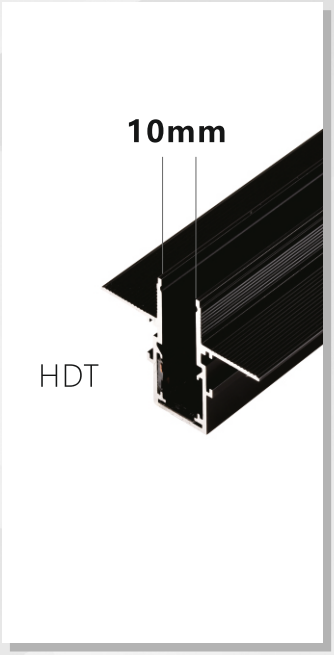

Magnetic Track

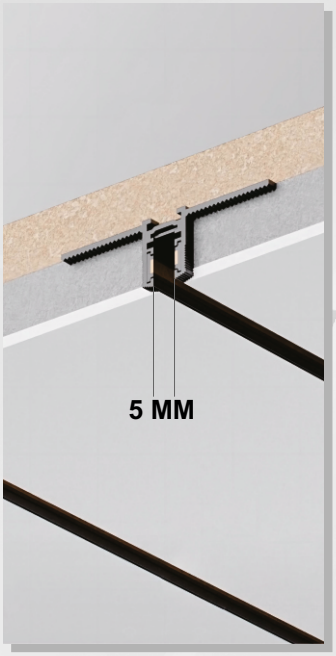

Magnetic Track



COB



COB

Powered By:
Agarwal Luminaires

ABOUT COMPANY

"Kelvin & Watts "is the brand which believes in inspiring a good living through advanced and imaginative Lighting Solutions by providing best in class architectural lighting products.

Unfettered by manufacturing, the company has built up formidable range of lighting products, for practically all types of applications. We use the international as well as indigenous production facilities as the back-end of our operations, and focus on adding value through design and packaging. All are product range are sourced from reputed manufacturers spread across the globe to cater to the requirements of national as well as international clients within a specified frame of time. Backed and supported with a team of efficient, dedicated and hard working professionals, we have been able to meet the requirements of our valuable customers in the most efficient manner.

We focuses on "OUTSIDE IN" approach to business, wherein we understand the needs of our clients and offer solutions that are best in class, consumer centric and delightful. By this approach we mean to say that, we have major focus on our client's specific requirements for specific application & try hard to bridge those gaps by fulfilling client's requirements satisfactorily.

"Kelvin & Watts" satiates the lighting needs for Architects, Interior Designers, Building Contractors, Hoteliers, Universities & Schools, Government Institutions, Corporate Clients and Individual Home-owners.

INDEX

10 mm Tracks	Page 5 Onwards
5 mm Tracks	Page 11 Onwards
DA25 Small Hole COB	Page 23 Onwards
DA35 COB	Page 25 Onwards
B-2021 COB	Page 28 Onwards
Star Series	Page 31 Onwards
Deep Anti Glare COB	Page 34 Onwards
Pencil Series COB	Page 35 Onwards
Recessed Ceiling Grill Light	Page 37 Onwards
Surface Cylinder Anti Glare	Page 43 Onwards
Frame Highliter	Page 45 Onwards





Individually Controlled Modules


KELVIN & WATTS


10 MM TRACKS



10 MM MAGNETIC TRACKS









COLORS

BK

MODEL NO.	Input	Material	Size(mm)
HDT-1M	DC 48V	Aluminum	L1000xW50xH40mm
HDT-2M	DC 48V	Aluminum	L2000xW50xH40mm








COLORS

BK

MODEL NO.	Input	Material	Size(mm)
HST-1M	DC 48V	Aluminum	L1000xW17xH26mm
HST-2M	DC 48V	Aluminum	L2000xW17xH26mm



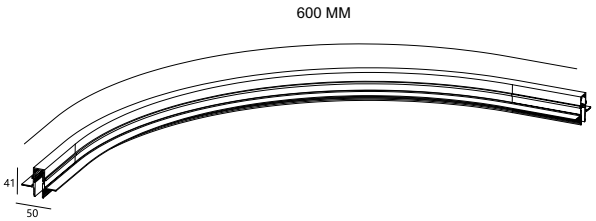


COLORS

BK

MODEL NO.	Material	Size(mm)
HDT-600-C90	Aluminum	600xW50xH41mm



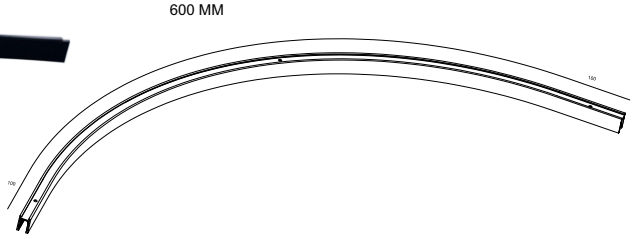


COLORS


BK

MODEL NO.	Input	Material	Size(mm)
HST-600-C90	DC 48V	Aluminum	Φ600 x 400mm

HLA1006S








LED brand: OSRAM
CCT: 3000K/4000K /CCT Dim Tune
Input(V): DC48V
Voltage & Current: 48V


Size: 145 x 10.5 x 38mm
Power: 5W
Material: Aluminium

Beam angle: 30°
CRI: Ra>90
Description: Grille Lamp

HLA1012S








LED brand: OSRAM
CCT: 3000K/4000K /CCT Dim Tune
Input(V): DC48V
Voltage & Current: 48V


Size: 226 x 10.5 x 38mm
Power: 10W
Material: Aluminium

Beam angle: 30°
CRI: Ra>90
Description: Grille Lamp

HLA1018S








LED brand: OSRAM
CCT: 3000K/4000K /CCT Dim Tune
Input(V): DC48V
Voltage & Current: 48V


Size: 226 x 10.5 x 38mm
Power: 15W
Material: Aluminium

Beam angle: 30°
CRI: Ra>90
Description: Grille Lamp

HLA1030S








LED brand: SANAN
CCT: 3000K/4000K /CCT Dim Tune
Input(V): DC48V
Voltage & Current: 48V


Size: 330 x 10.5 x 38mm
Power: 8W
Material: Aluminium

Beam angle: 100°
CRI: Ra>90
Description: Floodlights

HLA1045S








LED brand: SANAN
CCT: 3000K/4000K /CCT Dim Tune
Input(V): DC48V
Voltage & Current:


Size: 480 x 10.5 x 65mm
Power: 12W
Material: Aluminium

Beam angle: 100°
CRI: Ra>90
Description: Floodlights

HLA1060S







LED brand: SANAN
CCT: 3000K/4000K /CCT Dim Tune
Input(V): DC48V
Voltage & Current: 48V

Size: 630 x 10.5 x 38mm
Power: 16W
Material: Aluminium

Beam angle: 100°
CRI: Ra>90
Description: Floodlights


COLORS


Black

48V

HSA3035R







LED brand:
OSRAM

Size:
∅35 x 80mm

Beam angle:
15°/24°/36°

CCT:
3000K/4000K /CCT Dim Tune

Power:
5W

CRI:
Ra>90

Input(V):
DC48V


Material:
Aluminium


Description:
Spotlights

Voltage & Current:
36V 120mA

HSA3045R







LED brand:
OSRAM

Size:
∅45 x 100mm

Beam angle:
15°/24°/36°

CCT:
3000K/4000K /CCT Dim Tune

Power:
10W

CRI:
Ra>90

Input(V):
DC48V


Material:
Aluminium


Description:
Spotlights

Voltage & Current:
36V 250mA

HSA3060R







LED brand:
OSRAM

Size:
∅60 x 120mm

Beam angle:
15°/24°/36°

CCT:
3000K/4000K /CCT Dim Tune

Power:
18W

CRI:
Ra>90

Input(V):
DC48V


Material:
Aluminium


Description:
Spotlights

Voltage & Current:
36V 400mA

HSA1006S







LED brand:
OSRAM

Size:
145 x 10.5 x 65mm

Beam angle:
30°

CCT:
3000K/4000K /CCT Dim Tune

Power:
5W

CRI:
Ra>90

Input(V):
DC48V


Material:
Aluminium


Description:
Folding Grille Lamp

Voltage & Current:
48V

HSA1012S







LED brand:
OSRAM

Size:
226 x 10.5 x 65mm

Beam angle:
30°

CCT:
3000K/4000K /CCT Dim Tune

Power:
10W

CRI:
Ra>90

Input(V):
DC48V

Material:
Aluminium

Description:
Folding Grille Lamp


Voltage & Current:
48V


COLORS


Black


HST


HST-E00-P



H10HT-END


H10HT-C01


HST-J02


HST-L02


HST-END


H10HT-P01


HST-C01


HST-P01



HST-E00



HST-E01



HST-E02

HDT


HDT-J02


HDT-L02


HDT-END


HDT-C01



KELVIN & WATTS

5 MM TRACKS




Mini
magnet track





KELVIN & WATTS

5 MM TRACKS


RECESS TRACKS

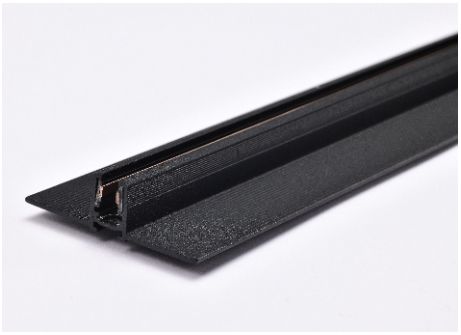

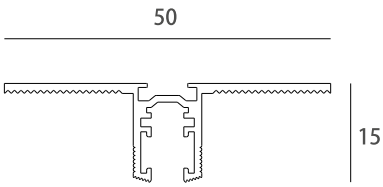





WDT-L01




WDT-J01




WT-END



WT-E01




WT-E02


WT0524100W

Type	Electrical Parameters	Length (mm)
WDT-1M	DC 24V	1000
WDT- 2M	DC 24V	2000



WRT-C01




WT-E04


SURFACE TRACKS







WST-L02




WST-J02


WST-C01




Type	Electrical Parameters	Length (mm)
WST-1M	DC 24V	1000
WST- 2M	DC 24V	2000

WDT

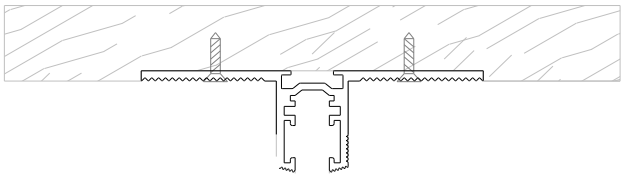

WST

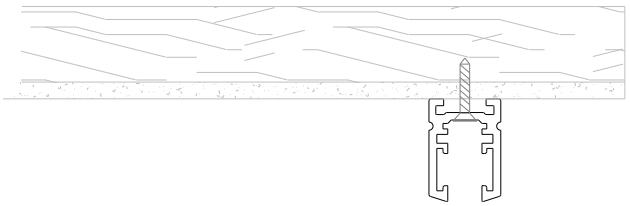



RECESS

SURFACE

RECESS CURVE TRACK






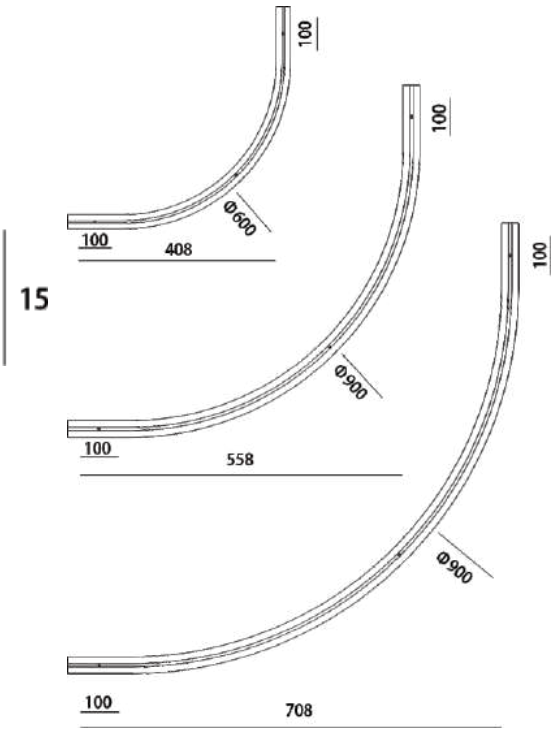


Type	Electrical Parameters	Length (mm)
WDT-R600Q	DC 24V	600MM
WDT-R900Q	DC 24V	900MM
WDT-R1200Q	DC 24V	1200MM


SURFACE CURVE TRACK





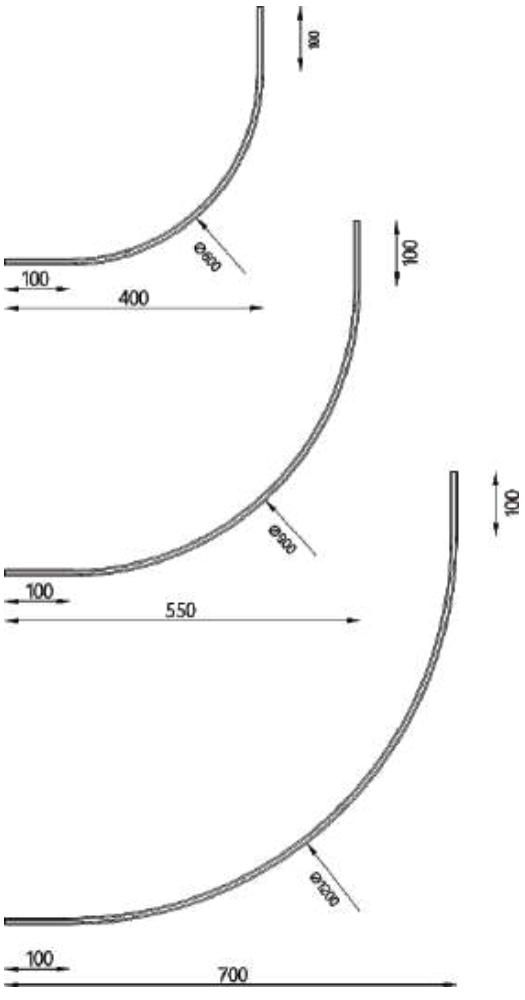


Type	Electrical Parameters	Length (mm)
WST-R300Q	DC 24V	300
WST-R300Q	DC 24V	600
WST-R300Q	DC 24V	900
WST-R300Q	DC 24V	1200

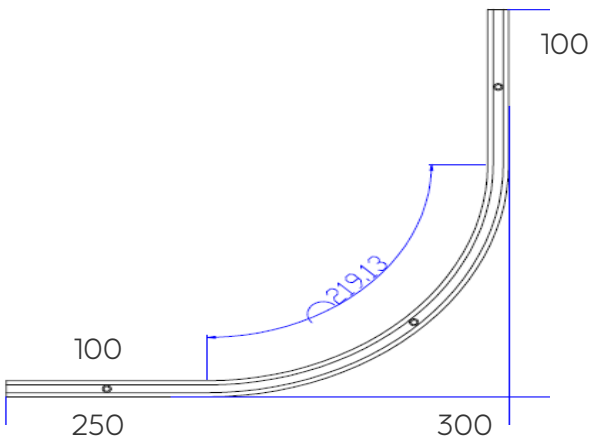


KELVIN & WATTS

Mini
Magnet Track

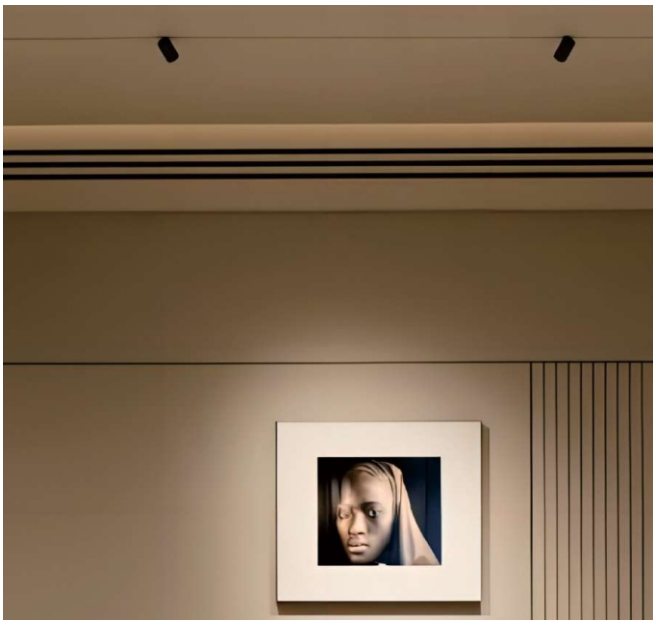

WSA0535DR






III | High CRI | 355° | IP20 | 90°

BK

LightSource: COB
Luminousflux: 500lm
CRI: Ra>90
CCT: 3000K/4000K
Material: Aluminum
Power: 5W
Outputvoltage: 36V
Outputcurrent: 120mA
OPTIC: 36°
Mainsvoltage: DC24V
Description: Magnetic rail spotlight
Cutout: /

WSA0545DR





III | High CRI | 355° | IP20 | 90°

BK AU

LightSource: COB
Luminousflux: 700lm
CRI: Ra>90
CCT: 3000K/4000K
Material: Aluminum
Power: 9W
Outputvoltage: 36V
Outputcurrent: 200mA
OPTIC: 36°
Mainsvoltage: DC24V
Description: Magnetic rail spotlight
Cutout: /






Extremely Slim Design



WWA0560NR-B





High CRI | IP20


LightSource: COB
Luminousflux: 450lm
CRI: Ra>90
CCT: 3000K/4000K

Material: Aluminum
Power: 5W
Outputvoltage: 36V
Outputcurrent: 120mA

OPTIC: 36°
Mainsvoltage: DC24V
Description: Magneticsuction
Colors: BK AU

WWB0513NR





High CRI | IP20

COLORS BK


LightSource: LED
Luminousflux: 700lm
CRI: Ra>80
CCT: 3000K/4000K

Material: Aluminum
Power: 12W
Outputvoltage: 24V
Outputcurrent: /

OPTIC: 100°
Mainsvoltage: DC24V
Description: Magneticsuction
Cutout: /

WWB0514NR





High CRI | IP20

COLORS BK

LightSource: LED
Luminousflux: 1100lm
CRI: Ra>80
CCT: 3000K/4000K

Material: Aluminum
Power: 18W
Outputvoltage: 24V
Outputcurrent: /

OPTIC: 100°
Mainsvoltage: DC24V
Description: Magneticsuction
Cutout: /







KELVIN & WATTS

RECESS LINEAR

WLB0560NS






High CRI | IP20


LightSource: LED
Luminousflux: 900lm
CRI: Ra>80
CCT: 3000K/4000K

Material: Aluminum+PC
Power: 10W
Outputvoltage: 24V
Outputcurrent: /

OPTIC: 100°
Mainsvoltage: DC24V
Description: Magneticsuction
Cutout: /

WLB0590NS





High CRI | IP20

LightSource: LED
Luminousflux: 1300lm
CRI: Ra>80
CCT: 3000K/4000K

Material: Aluminum+PC
Power: 15W
Outputvoltage: 24V
Outputcurrent: /

OPTIC: 100°
Mainsvoltage: DC24V
Description: Magneticsuction
Cutout: /



COLORS

BK


KELVIN & WATTS





DIFFUSED LINEAR


WLB1030NS



High CRI | IP20

LightSource: LED
Material: Aluminum
OPTIC: 100°
Luminousflux: 700lm
Power: 8W
Mainsvoltage: DC24V
CRI: Ra>80
Outputvoltage: 24V
Description: Magneticsuction
CCT: 3000K/4000K
Outputcurrent: /
Cutout: /


WLB1045NS



High CRI | IP20

LightSource: LED
Material: Aluminum
OPTIC: 100°
Luminousflux: 1100lm
Power: 12W
Mainsvoltage: DC24V
CRI: Ra>80
Outputvoltage: 24V
Description: Magneticsuction
CCT: 3000K/4000K
Outputcurrent: /
Cutout: /


WLB1060NS



High CRI | IP20

LightSource: LED
Material: Aluminum
OPTIC: 100°
Luminousflux: 1300lm
Power: 16W
Mainsvoltage: DC24V
CRI: Ra>80
Outputvoltage: 24V
Description: Magneticsuction
CCT: 3000K/4000K
Outputcurrent: /
Cutout: /

WLB1090NS



High CRI | IP20

LightSource: LED
Material: Aluminum
OPTIC: 100°
Luminousflux: 2300lm
Power: 24W
Mainsvoltage: DC24V
CRI: Ra>80
Outputvoltage: 24V
Description: Magneticsuction
CCT: 3000K/4000K
Outputcurrent: /
Cutout: /

COLORS

BK

KELVIN & WATTS






W05MAGNETSYSTEMseries

LASER BLADE


WLA1006NS



High CRI | IP20

LightSource: LED
Material: Aluminum
OPTIC: 30°
Luminousflux: 500lm
Power: 5W
Mainsvoltage: DC24V
CRI: Ra>90
Outputvoltage: 24V
Description: Magneticsuction
CCT: 3000K/4000K
Outputcurrent: /
Cutout: /


WLA1012NS



High CRI | IP20

LightSource: LED
Material: Aluminum
OPTIC: 30°
Luminousflux: 1100lm
Power: 10W
Mainsvoltage: DC24V
CRI: Ra>90
Outputvoltage: 24V
Description: Magneticsuction
CCT: 3000K/4000K
Outputcurrent: /
Cutout: /


WLA1018NS



High CRI | IP20

LightSource: LED
Material: Aluminum
OPTIC: 30°
Luminousflux: 1600lm
Power: 15W
Mainsvoltage: DC24V
CRI: Ra>90
Outputvoltage: 24V
Description: Magneticsuction
CCT: 3000K/4000K
Outputcurrent: /
Cutout: /

WLA1024NS



High CRI | IP20

LightSource: LED
Material: Aluminum
OPTIC: 30°
Luminousflux: 2300lm
Power: 20W
Mainsvoltage: DC24V
CRI: Ra>90
Outputvoltage: 24V
Description: Magneticsuction
CCT: 3000K/4000K
Outputcurrent: /
Cutout: /


COLORS

KELVIN & WATTS

MOVABLE LASER BLADE

WLA1506DS





High CRI IP20

LightSource: LED
Luminousflux: 221lm
CRI: Ra>90
CCT: 3000K/4000K


Material: Aluminum
Power: 6W
Outputvoltage: 24V
Outputcurrent: /

OPTIC: 30°
Mainsvoltage: DC24V
Description: Magnetic spot light
Cutout: /

WLA1512DS



WWB0501B



High CRI IP20

LightSource: LED
Luminousflux: 430lm
CRI: Ra>90
CCT: 3000K/4000K


Material: Aluminum
Power: 12W
Outputvoltage: 24V
Outputcurrent: /

OPTIC: 30°
Mainsvoltage: DC24V
Description: Magnetic spot light
Cutout: /



COLORS

WH



High CRI IP20

LightSource: LED
Luminousflux: 105lm
CRI: Ra>90
CCT: 3000K

Material: Aluminum
Power: 3W
Outputvoltage: 3V
Outputcurrent: 600mA

OPTIC: 360°
Mainsvoltage: DC24V
Description: Magnetic glass ball
Cutout: /




KELVIN & WATTS

PENDANT 5MM TRACK








High CRI | IP20

COLORS

AU

LightSource: LED	**Material:** Aluminum	**OPTIC:** 24°
Luminousflux: 180lm	**Power:** 3W	**Mainsvoltage:** DC24V
CRI: Ra>90	**Outputvoltage:** 3V	**Description:** Magneticsuction
CCT: 3000K	**Outputcurrent:** 600mA	**Cutout:** /





High CRI | IP20


COLORS

BK WH

LightSource: COB	**Material:** Aluminum	**OPTIC:** 40°
Luminousflux: 450lm	**Power:** 5W	**Mainsvoltage:** DC24V
CRI: Ra>90	**Outputvoltage:** 9V	**Description:** Magneticsuction
CCT: 3000K	**Outputcurrent:** 450mA	**Cutout:** /

WPB6208NR





Ø45

High CRI | IP20

COLORS

WH AU

LightSource: LED	**Material:** Aluminum	**OPTIC:** 24°
Luminousflux: 180lm	**Power:** 3W	**Mainsvoltage:** DC24V
CRI: Ra>90	**Outputvoltage:** 3V	**Description:** Magneticsuction
CCT: 3000K	**Outputcurrent:** 600mA	**Cutout:** /

KELVIN & WATTS

Linear Silicon Strip

W05MAGNETSYSTEMseries





WYB0501NS



1000

High CRI IP20

LightSource: LED	**Material:** Silicone	**OPTIC:** 100°
Luminousflux: /	**Power:** 8W	**Mainsvoltage:** DC24V
CRI: Ra>80	**Outputvoltage:** 24V	**Description:** Light Strip
CCT: 3000K	**Outputcurrent:** /	**Cutout:** /

WYB0502NS



2000

High CRI

LightSource: LED	**Material:** Silicone	**OPTIC:** 100°
Luminousflux: /	**Power:** 16W	**Mainsvoltage:** DC24V
CRI: Ra>80	**Outputvoltage:** 24V	**Description:** Light Strip
CCT: 3000K	**Outputcurrent:** /	**Cutout:** /

COLORS

WH

DA3502NR-A
005-010



DA2501NR
001-004




DA25


SMALL HOLE LIGHT
MORE ANTI-GLARE

KELVIN & WATTS

DA2501NR








LED brand: Luminus
CCT: 3000K/4000K /CCT Dim Tune
CRI: Ra>90
Size: Φ40x61


Material: aluminum
Power: 5W
Voltage & Current: 36V
Cutout: Φ35

Beam angle: 24°
Mains voltage: 220-240V 50/60Hz
Description: Downlight

DA2502NR








LED brand: Luminus
CCT: 3000K/4000K /CCT Dim Tune
CRI: Ra>90
Size: Φ50x63


Material: aluminum
Power: 7W
Voltage & Current: 36V
Cutout: Φ45

Beam angle: 24°
Mains voltage: 220-240V 50/60Hz
Description: Downlight

DA2503NR








LED brand: Luminus
CCT: 3000K/4000K /CCT Dim Tune
CRI: Ra>90
Size: Φ60x71


Material: aluminum
Power: 9W
Voltage & Current: 36V
Cutout: Φ55

Beam angle: 24°
Mains voltage: 220-240V 50/60Hz
Description: Downlight

DA2504NR







LED brand: Luminus
CCT: 3000K/4000K /CCT Dim Tune
CRI: Ra>90
Size: Φ70x71

Material: aluminum
Power: 12W
Voltage & Current: 36V
Cutout: Φ65

Beam angle: 24°
Mains voltage: 220-240V 50/60Hz
Description: Downlight



black white

DA35

KELVIN & WATTS

MASKS ARE AVAILABLE IN DIFFERENT SETS OF COLORS AND PLATING COLORS




KELVIN & WATTS

COB & SPOT LIGHTS

DA3502NR-A






High CRI · IP20 · 0-10V · Triac · DALI · Wireless

LED brand: OSRAM
CCT:
CRI: Ra>90
Size: Φ61x67
Material: aluminum
Power: 7W
Voltage & Current: 36V
Cutout: Φ55
Beam angle: 24°/36°
Mains voltage: 220-240V 50/60Hz
Description: Downlight

DA3503NR-A






High CRI · IP20 · 0-10V · Triac · DALI · Wireless

LED brand: OSRAM
CCT:
CRI: Ra>90
Size: Φ80x72
Material: aluminum
Power: 12W
Voltage & Current: 36V
Cutout: Φ75
Beam angle: 24°/36°
Mains voltage: 220-240V 50/60Hz
Description: Downlight

DA3503NR-B





High CRI · IP20 · 0-10V · Triac · DALI · Wireless

LED brand: OSRAM
CCT:
CRI: Ra>90
Size: Φ80x62
Material: aluminum
Power: 12W
Voltage & Current: 36V
Cutout: Φ75
Beam angle: 24°/36°
Mains voltage: 220-240V 50/60Hz
Description: Downlight

black white black+white



From Modern Design To craftsmanship



Encounter the Beauty of Craftsmanship



Wonderful

KELVIN & WATTS



KELVIN & WATTS

B-2021 COB

Round Face Frame COB Spotlight Series



Power	CCT Temp	Lamp body size	Hole size
7 W	3000K/4000K /CCT Dim Tune	65˚ H68mm	55mm
12 W	3000K/4000K /CCT Dim Tune	84*H92mm	75mm
25 W	3000K/4000K /CCT Dim Tune	110*H110mm	95mm

REFLECTOR COLOURS: MATT BLACK/ MATT WHITE/ NICKEL BLACK




NICKEL BLACK



MATT WHITE



MATT BLACK

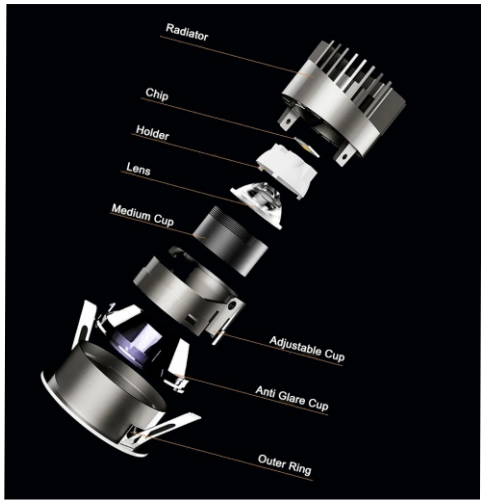





KELVIN & WATTS

DEEP ANTI GLARE

WITH TRIM



Model NO.	Power	CCT	DIM	Beam Angle
KW - SP 508	9W	**2700K/3000K/4000K/ 6000K/CCT DIM TUNE**	60mmx75 mm ϕ 56 mm	24º / 38º / 60º
			Finishes: ☐ Matt–White	■ Matt–Black

Model NO.	Power	CCT	DIM	Beam Angle
KW - SP 509	15W	**2700K/3000K/4000K/ 6000K/CCT DIM TUNE**	78mmx90 mm ϕ 70 mm	24º / 38º / 60º
			Finishes: ☐ Matt–White	■ Matt–Black

Model NO.	Power	CCT	DIM	Beam Angle
KW - SP 510	20W	**2700K/3000K/4000K/ 6000K/CCT DIM TUNE**	84mmx105 mm ϕ 78 mm	24º / 38º / 60º
			Finishes: ☐ Matt–White	■ Matt–Black

Bluetooth + WiFi · DALI · tuya · zigbee

TRIMLESS



Model NO.	Power	CCT	DIM	Beam Angle
KW -TR 508	9W	**2700K/3000K/4000K/ 6000K/CCT DIM TUNE**	56mmx75 mm ϕ 56 mm	24º / 38º / 60º
			Finishes: ☐ Matt–White	■ Matt–Black

Model NO.	Power	CCT	DIM	Beam Angle
KW - TR 509	15W	**2700K/3000K/4000K/ 6000K/CCT DIM TUNE**	70mmx90 mm ϕ 70 mm	24º / 38º / 60º
			Finishes: ☐ Matt–White	■ Matt–Black

Model NO.	Power	CCT	DIM	Beam Angle
KW - TR 510	20W	**2700K/3000K/4000K/ 6000K/CCT DIM TUNE**	80mmx105 mm ϕ 80 mm	24º / 38º / 60º
			Finishes: ☐ Matt–White	■ Matt–Black

Bluetooth + WiFi · DALI · tuya · zigbee



Ceiling View

PENCIL SERIES



KW SP- 1001 (Pinhole)

High CRI | IP20 | 30° | 0-10V | Triac | DALI | Wireless

Power Watt	: 10W
Lamp	: CREE & BRIDGELUX
Size	: 42 MM
Cut Out	: 38 MM
Height	: 91 MM
Color Temp	: 2700K / 3000K / 4000K / 5000K / 6000K
Beam Angle	: 24°/ 38°/ 60°
Material	: ALUMINIUM
Body Color	: WHITE & BLACK



KW SP- 1002 (Light & Shadow)

High CRI | IP20 | 30° | 0-10V | Triac | DALI | Wireless

Power Watt	: 10W
Lamp	: CREE & BRIDGELUX
Size	: 42 MM
Cut Out	: 38 MM
Height	: 91 MM
Color Temp	: 2700K / 3000K / 4000K / 5000K / 6000K
Beam Angle	: 24°/ 38°/ 60°
Material	: ALUMINIUM
Body Color	: WHITE & BLACK



KW SP- 1003 (Wide Throw)

High CRI | IP20 | 30° | 0-10V | Triac | DALI | Wireless


Power Watt	: 10W
Lamp	: CREE & BRIDGELUX
Size	: 42 MM
Cut Out	: 38 MM
Height	: 91 MM
Color Temp	: 2700K / 3000K / 4000K / 5000K / 6000K
Beam Angle	: 24°/ 38°/ 60°
Material	: ALUMINIUM
Body Color	: WHITE & BLACK



For Trimless




KW SP- 1005 (Light & Shadow)

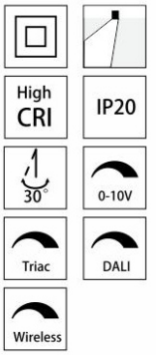

Power Watt	: 15W
Lamp	: CREE & BRIDGELUX
Size	: 57.5 MM
Cut Out	: 54 MM
Height	: 79 MM
Color Temp	: 2700K / 3000K / 4000K / 5000K / 6000K
Beam Angle	: 24°/ 38°/ 60°
Material	: ALUMINIUM
Body Color	: WHITE & BLACK




KW SP- 1006 (WIDE Throw)

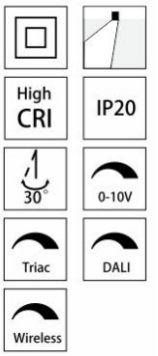

Power Watt	: 15W
Lamp	: CREE & BRIDGELUX
Size	: 57.5 MM
Cut Out	: 54 MM
Height	: 79 MM
Color Temp	: 2700K / 3000K / 4000K / 5000K / 6000K
Beam Angle	: 24°/ 38°/ 60°
Material	: ALUMINIUM
Body Color	: WHITE & BLACK

KW - SPF 803




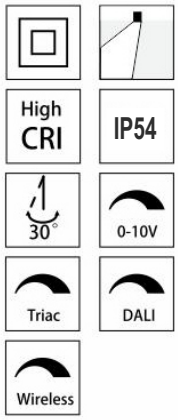

Power Watt	: 15W
Lamp	: CREE & BRIDGELUX
Size	: 128*28* MM
Cut Out	: 122*22* MM
Height	: 38 MM
Color Temp	: 2700K / 3000K / 4000K / 5000K / 6000K
Beam Angle	: 24°/ 38°/ 60°
Material	: ALUMINIUM
Body Color	: WHITE & BLACK

KW - SPF 804



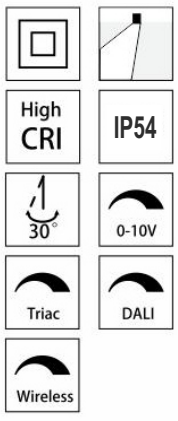

Power Watt	: 25W
Lamp	: CREE & BRIDGELUX
Size	: 123 MM
Cut Out	: 110 MM
Height	: 92.5 MM
Color Temp	: 2700K / 3000K / 4000K / 5000K / 6000K
Beam Angle	: 24°/ 38°/ 60°
Material	: ALUMINIUM
Body Color	: WHITE & BLACK

PROJECT SERIES



The Project Series is designed to offer high-performance lighting solutions for large-scale installations, including commercial spaces, real estate developments, hospitality projects, and outdoor landscapes. Our carefully curated selection ensures optimal efficiency, durability, and aesthetics, making it the preferred choice for architects, designers, and project managers.

Each product in this series is crafted with precision engineering, advanced lighting technology, and premium materials, ensuring long-lasting performance in demanding environments. With a focus on energy efficiency, smart integrations, and modern designs, the Project Series is ideal for large-scale implementations where quality and reliability matter the most.

Key Features of the Project Series:

- Customizable solutions to match different project requirements
- Energy-efficient designs for cost savings and sustainability
- Smart lighting compatibility for seamless automation
- Premium build quality to withstand long-term use
- Versatile applications for interiors, landscapes, and commercial spac

Explore our Project Series lineup and bring innovation, efficiency, and elegance to your lighting projects.

Terms & Conditions

1. **Product Availability:** Products in the Project Series are subject to stock levels and production timelines. Custom orders may require additional lead time.
2. **Delivery Timeline:** Standard Turnaround Time (TAT) is 20–25 days, but it may vary based on order size, customization, and location.
3. **Customization & Modifications:** Any request for customization or modifications must be confirmed at the time of order placement. Additional charges and extended delivery timelines may apply.
4. **Warranty & Support:** All products in the Project Series come with a standard manufacturer warranty. Warranty coverage excludes damage due to mishandling, improper installation, or external factors beyond our control.
5. **Returns & Replacements:** Returns or replacements are accepted only in case of manufacturing defects and must be reported within 7 days of delivery.
6. **Installation & Usage:** Professional installation is recommended for optimal performance. The company is not responsible for issues arising due to incorrect installation or usage.

Kelvin & Watts

Ceiling Light



Ø55mm
15W

Ø45mm
10W

Ø35mm
7W



Miniaturized Design

Cut out of 35/45/55mm, meeting the requirements for removing main lights;

The Light source is deeply hidden and anti glare, with options for direct illumination and angle adjustment.

It has a split structure and is easy to disassemble and assemble.



Adjustable irradiation angle

Not limited to the position of lighting fixtures, meeting the lighting needs of different places

Product appearance display


1. High quality aluminum lamp body
Durable, corrosion-resistant and rust proof.



2.30 ° irradiation angle
The irradiation angle can be adjusted freely.



3.30 ° irradiation angle
Strong air convection design, faster and safer heat dissipation.

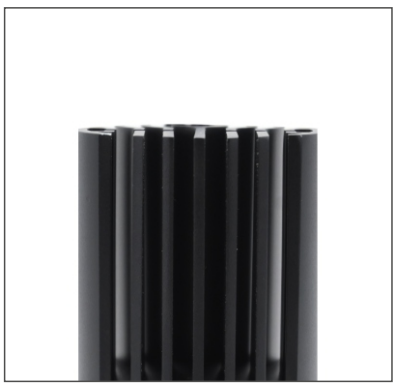






STAR SERIES

Narrow Border	No border
 Ø25mm	 Ø25mm
 Ø35mm	 Ø35mm
 Ø45mm	 Ø45mm
 Ø55mm	 Ø55mm


Colors







Model NO.	Power	CCT	SDCM	CRI	Luminous flux
MS-WL1306 WITH TRIM	**7W**	**2700K/3000K/4000K/ 6000K/CCT DIM TUNE**	< 3	Ra>90	248Lm

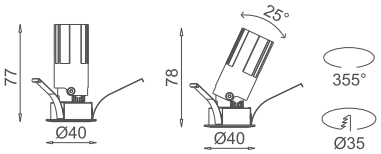

CITIZEN CREE OSRAM LUMINUS PHILIPS BRIDGELUX

COB CE CCC RoHS F

DALI 0-10V TRIAC IP 20


15° 24° 36°

Finishes: ☐ Matt–White ■ Matt–Black

DALI tuya zigbee



Model NO.	Power	CCT	SDCM	CRI	Luminous flux
MS-WL1307 TRIMLESS	**7W**	**2700K/3000K/4000K/ 6000K/CCT DIM TUNE**	< 3	Ra>90	248Lm

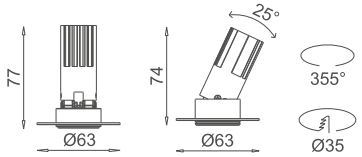

CITIZEN CREE OSRAM LUMINUS PHILIPS BRIDGELUX

COB CE CCC RoHS F

DALI 0-10V TRIAC IP 20


15° 24° 36°

Finishes: ☐ Matt–White ■ Matt–Black

DALI tuya zigbee



Model NO.	Power	CCT	SDCM	CRI	Luminous flux
MS-WL1308 WITH TRIM	**12W**	**2700K/3000K/4000K/ 6000K/CCT DIM TUNE**	< 3	Ra>90	800Lm

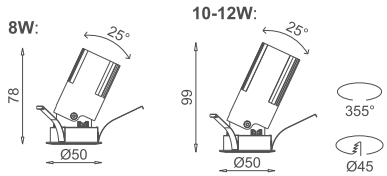

CITIZEN CREE OSRAM LUMINUS PHILIPS BRIDGELUX

COB CE CCC RoHS F

DALI 0-10V TRIAC IP 20


15° 24° 36°

Finishes: ☐ Matt–White ■ Matt–Black

DALI tuya zigbee



Model NO.	Power	CCT	SDCM	CRI	Luminous flux
MS-WL1309 TRIMLESS	**12W**	**2700K/3000K/4000K/ 6000K/CCT DIM TUNE**	< 3	Ra>90	800Lm

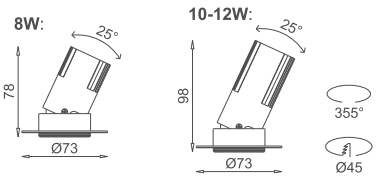

CITIZEN CREE OSRAM LUMINUS PHILIPS BRIDGELUX

COB CE CCC RoHS F

DALI 0-10V TRIAC IP 20


15° 24° 36°

Finishes: ☐ Matt–White ■ Matt–Black

DALI tuya zigbee



Model NO.	Power	CCT	SDCM	CRI	Luminous flux
MS-WL1310 WITH TRIM	**15W**	**2700K/3000K/4000K/ 6000K/CCT DIM TUNE**	< 3	Ra>90	990Lm

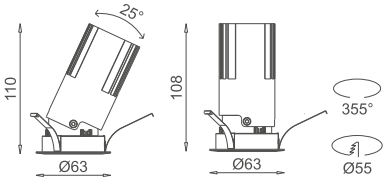

CITIZEN CREE OSRAM LUMINUS PHILIPS BRIDGELUX

COB CE CCC RoHS F


DALI 0-10V TRIAC IP 20

15° 24° 36°

Finishes: ☐ Matt–White ■ Matt–Black



Model NO.	Power	CCT	SDCM	CRI	Luminous flux
MS-WL1311 TRIMLESS	**15W**	**2700K/3000K/4000K/ 6000K/CCT DIM TUNE**	< 3	Ra>90	990Lm

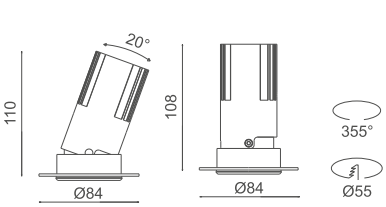

CITIZEN CREE OSRAM LUMINUS PHILIPS BRIDGELUX


COB CE CCC RoHS F

DALI 0-10V TRIAC IP 20


15° 24° 36°


Finishes: ☐ Matt–White ■ Matt–Black

Installation steps





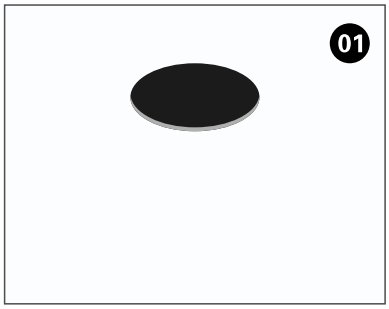

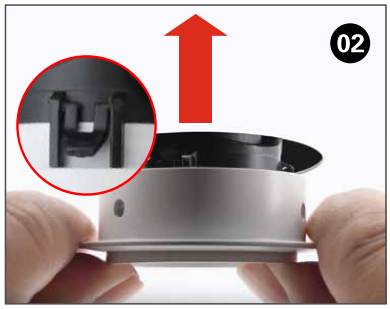







RECESSED CEILING GRILL LIGHT

Embedded Ceiling Lamp Series






DA41XX series

- Modern fashion design.
- Framed, framless,recessed stretched and surface mounted design,satisfied with the lighting needs of different area.
- Combine optics and practicality to create personalized lighting solutions.

DA4101NS





High CRI

IP20

Light Source: SMD

Luminous flux: 130 lm

CRI: CRI>90

CCT: 2700K/3000K/4000K/5000K

Material: Aluminum

Power: 2W

Output voltage: 3V


Output current: 500mA

OPTIC: 15°/24°/38°


Mains voltage: 220-240V

Description: Downlight


Cutout: 25X25



h (m)	D(cm)	Em (lx)
1	0.3	985
2	0.5	246
3	0.8	109
4	1.1	62
5	1.3	39




h (m)	D(m)	Em (lx)
1	0.4	755
2	0.9	189
3	1.3	84
4	1.7	47
5	2.1	30



h (m)	D(m)	Em (lx)
1	0.7	350
2	1.4	88
3	2.1	39
4	2.8	22
5	3.4	14

DA4103NS





High CRI

IP20

Light Source: SMD

Luminous flux: 390 lm

CRI: CRI>90

CCT: 2700K/3000K/4000K/5000K

Material: Aluminum

Power: 6W

Output voltage: 9V


Output current: 500mA

OPTIC: 15°/24°/38°


Mains voltage: 220-240V

Description: Downlight


Cutout: 73X25



h (m)	D(cm)	Em (lx)
1	0.3	3955
2	0.5	989
3	0.8	439
4	1.1	247
5	1.3	158




h (m)	D(m)	Em (lx)
1	0.4	1750
2	0.9	438
3	1.3	194
4	1.7	109
5	2.1	70



h (m)	D(m)	Em (lx)
1	0.7	950
2	1.4	238
3	2.1	106
4	2.8	59
5	3.4	38

DA4105NS





High CRI

IP20

Light Source: SMD

Luminous flux: 650 lm

CRI: CRI>90

CCT: 2700K/3000K/4000K/5000K

Material: Aluminum

Power: 10W

Output voltage: 15V


Output current: 600mA

OPTIC: 15°/24°/38°


Mains voltage: 220-240V

Description: Downlight


Cutout: 119X25



h (m)	D(cm)	Em (lx)
1	0.3	7545
2	0.5	1886
3	0.8	838
4	1.1	472
5	1.3	302




h (m)	D(m)	Em (lx)
1	0.4	3980
2	0.9	995
3	1.3	442
4	1.7	249
5	2.1	159



h (m)	D(m)	Em (lx)
1	0.7	1750
2	1.4	438
3	2.1	194
4	2.8	109
5	3.4	70

DA4110NS





High CRI

IP20

Light Source: SMD

Luminous flux: 1300 lm

CRI: CRI>90

CCT: 2700K/3000K/4000K/5000K

Material: Aluminum

Power: 20W

Output voltage: 30V


Output current: 600mA

OPTIC: 15°/24°/38°


Mains voltage: 220-240V

Description: Downlight


Cutout: 234X25



h (m)	D(cm)	Em (lx)
1	0.3	15225
2	0.5	3806
3	0.8	1692
4	1.1	952
5	1.3	609




h (m)	D(m)	Em (lx)
1	0.4	7030
2	0.9	1758
3	1.3	781
4	1.7	439
5	2.1	281



h (m)	D(m)	Em (lx)
1	0.7	3210
2	1.4	803
3	2.1	357
4	2.8	201
5	3.4	128

DA4101NSW





High CRI

IP20

Light Source: SMD

Material: Aluminum

OPTIC: 15°/24°/38°

Luminous flux: 130 lm

Power: 2W

Mains voltage: 220-240V

CRI: CRI>90


Output voltage: 3V

Description: Downlight


CCT: 2700K/3000K/4000K/5000K

Output current: 500mA


Cutout: 40X40



h (m)	D(cm)	Em (lx)
1	0.3	985
2	0.5	246
3	0.8	109
4	1.1	62
5	1.3	39




h (m)	D(m)	Em (lx)
1	0.4	755
2	0.9	189
3	1.3	84
4	1.7	47
5	2.1	30



h (m)	D(m)	Em (lx)
1	0.7	350
2	1.4	88
3	2.1	39
4	2.8	22
5	3.4	14

DA4103NSW





High CRI

IP20

Light Source: SMD

Material: Aluminum

OPTIC: 15°/24°/38°

Luminous flux: 390 lm

Power: 6W

Mains voltage: 220-240V

CRI: CRI>90


Output voltage: 9V

Description: Downlight


CCT: 2700K/3000K/4000K/5000K

Output current: 500mA


Cutout: 86X40



h (m)	D(cm)	Em (lx)
1	0.3	3955
2	0.5	989
3	0.8	439
4	1.1	247
5	1.3	158




h (m)	D(m)	Em (lx)
1	0.4	1750
2	0.9	438
3	1.3	194
4	1.7	109
5	2.1	70



h (m)	D(m)	Em (lx)
1	0.7	950
2	1.4	238
3	2.1	106
4	2.8	59
5	3.4	38

DA4105NSW





High CRI

IP20

Light Source: SMD

Material: Aluminum

OPTIC: 15°/24°/38°

Luminous flux: 650 lm

Power: 10W

Mains voltage: 220-240V

CRI: CRI>90


Output voltage: 15V

Description: Downlight


CCT: 2700K/3000K/4000K/5000K

Output current: 600mA


Cutout: 132X40



h (m)	D(cm)	Em (lx)
1	0.3	7545
2	0.5	1886
3	0.8	838
4	1.1	472
5	1.3	302




h (m)	D(m)	Em (lx)
1	0.4	3980
2	0.9	995
3	1.3	442
4	1.7	249
5	2.1	159



h (m)	D(m)	Em (lx)
1	0.7	1750
2	1.4	438
3	2.1	194
4	2.8	109
5	3.4	70

DA4110NSW





High CRI

IP20

Light Source: SMD

Material: Aluminum

OPTIC: 15°/24°/38°

Luminous flux: 1300 lm

Power: 20W

Mains voltage: 220-240V

CRI: CRI>90


Output voltage: 30V

Description: Downlight


CCT: 2700K/3000K/4000K/5000K

Output current: 600mA


Cutout: 247X40



h (m)	D(cm)	Em (lx)
1	0.3	15225
2	0.5	3806
3	0.8	1692
4	1.1	952
5	1.3	609




h (m)	D(m)	Em (lx)
1	0.4	7030
2	0.9	1758
3	1.3	781
4	1.7	439
5	2.1	281



h (m)	D(m)	Em (lx)
1	0.7	3210
2	1.4	803
3	2.1	357
4	2.8	201
5	3.4	128

DA4103DS





High CRI

30°

IP20

Light Source:
SMD

Material:
Aluminum

OPTIC:
15°/24°/38°

Luminous flux:
390 lm

Power:
6W

Mains voltage:
220-240V

CRI:
CRI>90

Output voltage:
9V


Description:
ADJUSTABLE

CCT:
2700K/3000K/4000K/5000K

Output current:
500mA


Cutout:
82X44

15°




h (m)	D(cm)	Em (lx)
1	0.3	3955
2	0.5	989
3	0.8	439
4	1.1	247
5	1.3	158

24°



h (m)	D(m)	Em (lx)
1	0.4	1750
2	0.9	438
3	1.3	194
4	1.7	109
5	2.1	70


38°



h (m)	D(m)	Em (lx)
1	0.7	950
2	1.4	238
3	2.1	106
4	2.8	59
5	3.4	38

DA4105DS





High CRI

30°

IP20

Light Source:
SMD

Material:
Aluminum

OPTIC:
15°/24°/38°

Luminous flux:
650 lm

Power:
10W

Mains voltage:
220-240V

CRI:
CRI>90

Output voltage:
15V


Description:
ADJUSTABLE

CCT:
2700K/3000K/4000K/5000K

Output current:
600mA


Cutout:
128X44

15°




h (m)	D(cm)	Em (lx)
1	0.3	7545
2	0.5	1886
3	0.8	838
4	1.1	472
5	1.3	302

24°



h (m)	D(m)	Em (lx)
1	0.4	3980
2	0.9	995
3	1.3	442
4	1.7	249
5	2.1	159


38°



h (m)	D(m)	Em (lx)
1	0.7	1750
2	1.4	438
3	2.1	194
4	2.8	109
5	3.4	70

DA4110DS





High CRI

30°

IP20

Light Source:
SMD

Material:
Aluminum

OPTIC:
15°/24°/38°

Luminous flux:
1300 lm

Power:
20W

Mains voltage:
220-240V

CRI:
CRI>90

Output voltage:
30V


Description:
ADJUSTABLE

CCT:
2700K/3000K/4000K/5000K

Output current:
600mA


Cutout:
243X44

15°




h (m)	D(cm)	Em (lx)
1	0.3	15225
2	0.5	3806
3	0.8	1692
4	1.1	952
5	1.3	609

24°




h (m)	D(m)	Em (lx)
1	0.4	7030
2	0.9	1758
3	1.3	781
4	1.7	439
5	2.1	281

38°




h (m)	D(m)	Em (lx)
1	0.7	3210
2	1.4	803
3	2.1	357
4	2.8	201
5	3.4	128

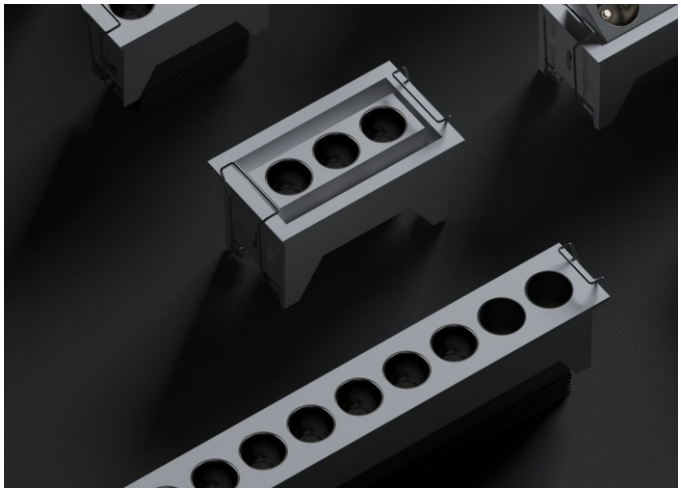




DA4103DSW









Light Source: SMD
Material: Aluminum
OPTIC: 15°/24°/38°
Luminous flux: 390 lm
Power: 6W
Mains voltage: 220-240V
CRI: CRI>90
Output voltage: 9V
Description: ADJUSTABLE
CCT: 2700K/3000K/4000K/5000K
Output current: 500mA
Cutout: 94X57



h (m)	D(cm)	Em (lx)
1	0.3	3955
2	0.5	989
3	0.8	439
4	1.1	247
5	1.3	158




h (m)	D(m)	Em (lx)
1	0.4	1750
2	0.9	438
3	1.3	194
4	1.7	109
5	2.1	70



h (m)	D(m)	Em (lx)
1	0.7	950
2	1.4	238
3	2.1	106
4	2.8	59
5	3.4	38


DA4105DSW









Light Source: SMD
Material: Aluminum
OPTIC: 15°/24°/38°
Luminous flux: 650 lm
Power: 10W
Mains voltage: 220-240V
CRI: CRI>90
Output voltage: 15V
Description: ADJUSTABLE
CCT: 2700K/3000K/4000K/5000K
Output current: 600mA
Cutout: 140X57



h (m)	D(cm)	Em (lx)
1	0.3	7545
2	0.5	1886
3	0.8	838
4	1.1	472
5	1.3	302




h (m)	D(m)	Em (lx)
1	0.4	3980
2	0.9	995
3	1.3	442
4	1.7	249
5	2.1	159



h (m)	D(m)	Em (lx)
1	0.7	1750
2	1.4	438
3	2.1	194
4	2.8	109
5	3.4	70


DA4110DSW









Light Source: SMD
Material: Aluminum
OPTIC: 15°/24°/38°
Luminous flux: 1300 lm
Power: 20W
Mains voltage: 220-240V
CRI: CRI>90
Output voltage: 30V
Description: ADJUSTABLE
CCT: 2700K/3000K/4000K/5000K
Output current: 600mA
Cutout: 255X57



h (m)	D(cm)	Em (lx)
1	0.3	15225
2	0.5	3806
3	0.8	1692
4	1.1	952
5	1.3	609



h (m)	D(m)	Em (lx)
1	0.4	7030
2	0.9	1758
3	1.3	781
4	1.7	439
5	2.1	281





h (m)	D(m)	Em (lx)
1	0.7	3210
2	1.4	803
3	2.1	357
4	2.8	201
5	3.4	128





DA4101RS





High CRI

30°

IP20

Light Source:
SMD

Luminous flux:
130 lm

CRI:
CRI>90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
2W

Output voltage:
3V


Output current:
500mA

OPTIC:
15°/24°/38°


Mains voltage:
220-240V

Description:
ADJUSTABLE / STRETCHING


Cutout:
25X25



h (m)	D(cm)	Em (lx)
1	0.3	985
2	0.5	246
3	0.8	109
4	1.1	62
5	1.3	39




h (m)	D(m)	Em (lx)
1	0.4	755
2	0.9	189
3	1.3	84
4	1.7	47
5	2.1	30



h (m)	D(m)	Em (lx)
1	0.7	350
2	1.4	88
3	2.1	39
4	2.8	22
5	3.4	14

DA4103RS





High CRI

30°

IP20

Light Source:
SMD

Luminous flux:
390 lm

CRI:
CRI>90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
6W

Output voltage:
9V


Output current:
500mA

OPTIC:
15°/24°/38°


Mains voltage:
220-240V

Description:
ADJUSTABLE / STRETCHING


Cutout:
73X25



h (m)	D(cm)	Em (lx)
1	0.3	3955
2	0.5	989
3	0.8	439
4	1.1	247
5	1.3	158




h (m)	D(m)	Em (lx)
1	0.4	1750
2	0.9	438
3	1.3	194
4	1.7	109
5	2.1	70



h (m)	D(m)	Em (lx)
1	0.7	950
2	1.4	238
3	2.1	106
4	2.8	59
5	3.4	38

DA4105RS





High CRI

30°

IP20

Light Source:
SMD

Luminous flux:
650 lm

CRI:
CRI>90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
10W

Output voltage:
15V


Output current:
600mA

OPTIC:
15°/24°/38°


Mains voltage:
220-240V

Description:
ADJUSTABLE / STRETCHING


Cutout:
119X25




h (m)	D(cm)	Em (lx)
1	0.3	15225
2	0.5	3806
3	0.8	1692
4	1.1	952
5	1.3	609



h (m)	D(m)	Em (lx)
1	0.4	7030
2	0.9	1758
3	1.3	781
4	1.7	439
5	2.1	281



h (m)	D(m)	Em (lx)
1	0.7	3210
2	1.4	803
3	2.1	357
4	2.8	201
5	3.4	128

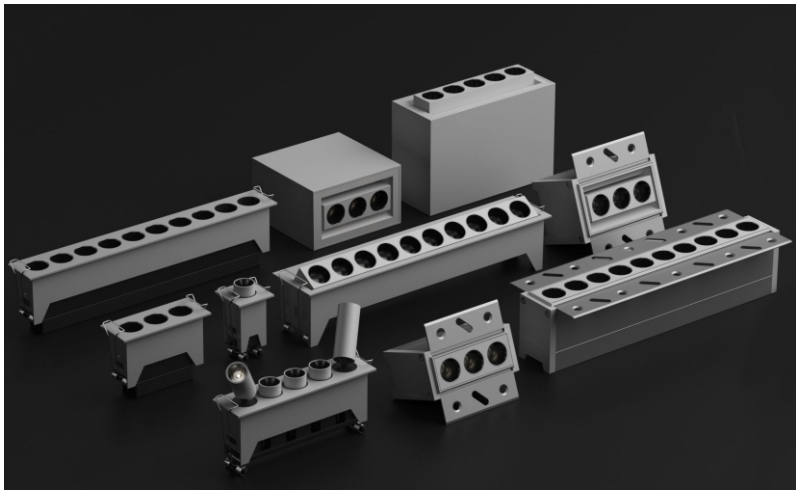



KELVIN & WATTS

Surface Cylinder Anti Glare

Surface-Mounted LED Lights









▲

Easy Installation





▲

Die-cast Aluminum



▲

Multi-Head Design



▲

High-Brightness COB Chip

Anti-Glare Optical Lens

High temperature resistant material, uniform light spot,
No astigmatism, No shadow




120° Wide Beam Angle
Bright and Wide-Angle Lighting

Making the space feel more open and comfortable.



KW SF- 714




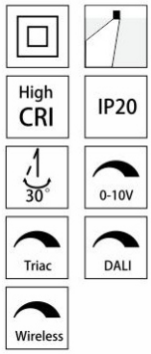

Power Watt	: 6W
Lamp	: CREE & BRIDGELUX
Size	: 50 MM
Height	: 60 MM
Color Temp	: 2700K / 3000K / 4000K / 5000K / 6000K
Beam Angle	: 24°/ 38°/ 60º
Material	: ALUMINIUM
Body Color	: WHITE & BLACK

KW SF- 715




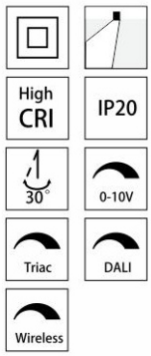


Power Watt	: 12W
Lamp	: CREE & BRIDGELUX
Size	: 75 MM
Height	: 70 MM
Color Temp	: 2700K / 3000K / 4000K / 5000K / 6000K
Beam Angle	: 24°/ 38°/ 60º
Material	: ALUMINIUM
Body Color	: WHITE & BLACK

KW SF- 716



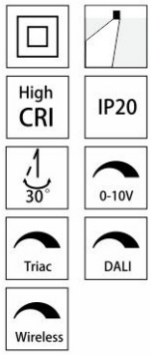


Power Watt	: 18W
Lamp	: CREE & BRIDGELUX
Size	: 95 MM
Height	: 75 MM
Color Temp	: 2700K / 3000K / 4000K / 5000K / 6000K
Beam Angle	: 24°/ 38°/ 60º
Material	: ALUMINIUM
Body Color	: WHITE & BLACK

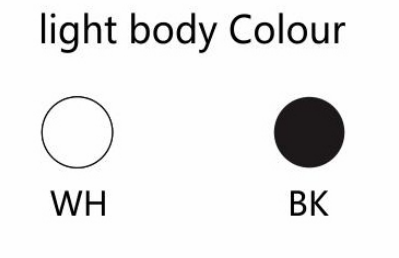

KELVIN & WATTS

PRO 210 (Frame Highliter)



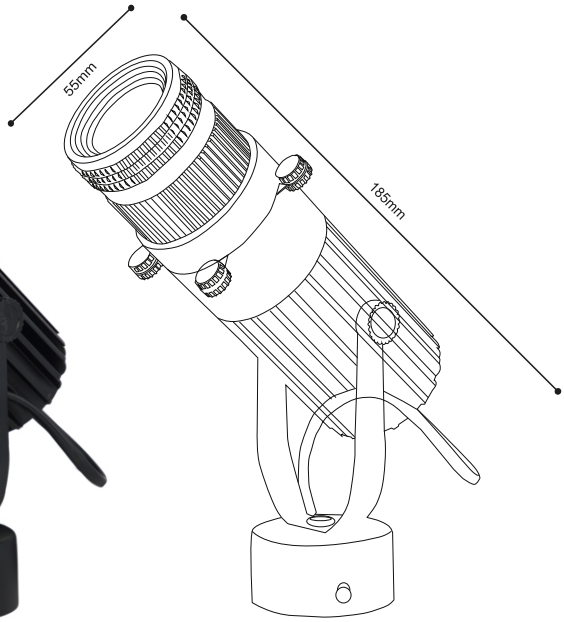

SPECIFICATION


LED	CREE
DRIVER	Tirich
CCT	3000K
LUMENS OUTPUT	130-140 LM/W
Lense	Shinland
MATERIAL	Aluminium Die Costing
BEAM ANGLE	38°
CRI	80 / 90
Input Voltage	150-240 Vac 50 Hz
Power Factor	>0.90

COLOR TEMPERATURE

3K

Power	Body Colour	Dimension
12W	BLACK	55*185mm

SHAPE HIGHLIGHT

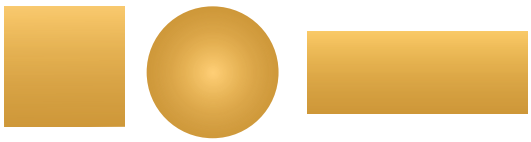

Note

Note

KELVIN & WATTS

INDIA OFFICE :

KW LIGHTING TECHNOLOGY PVT LTD

35, Basant Bahar Colony, Opp Bhandari Hospital, Gopalpura Byepass,
Tonk Road, Jaipur, Rajasthan, India

MOB: +91-9660079242, +91 - 9829363368

Email: info@kelvinandwatts.com